

Site Monitor

Enterprise Monitoring Platform — User Guide

Version: 20.198.0

Document date: 2026-11-14

Language: English

Site Monitor — Enterprise Monitoring Platform

Version `20.198.0` · August 2026 · English

Table of Contents

1. Executive Summary
2. The Problem
3. What the Platform Does
4. Architecture and Technology
5. System Topology
6. Database Schema
7. The Certificate Check Pipeline
8. Alerting and Escalation
9. Notifications
10. Monitor Types
11. Maintenance Windows
12. Security Model
13. Roles and Permissions
14. Screens and Actions
15. Operational Procedures
16. Deployment and DevOps
17. Resilience and Availability
18. Configuration Reference
19. Release Information
20. Production Readiness Checklist
21. Glossary

1. Executive Summary

Site Monitor watches your organisation's public and internal services from a single pane of glass. At its core sits SSL/TLS certificate lifecycle management, and around that core we have built HTTP, port, DNS and ping availability checks, page integrity auditing, synthetic (k6) journey tests and domain registration tracking. It spots problems before you do, raises an alert with the team that owns the service, and keeps an audit trail of the whole thing.

When a certificate expires unexpectedly, customer traffic stops, browsers throw security warnings and you have a compliance problem on your hands. Site Monitor removes that scenario in three steps: it scans every domain in your inventory hourly, it escalates to the owning team 30, 15 and 7 days before expiry, and it keeps reminding them daily until the renewal is done.

Different people use the platform for very different reasons:

Who	What they use it for
Operations and infrastructure teams	Certificate and availability monitoring, coordinating renewals
Application development teams	Watching their own services, writing the weekly report
IT security	Auditing, spotting weak algorithms, compliance evidence
Managers (product owners, heads of department, C-level)	Overall health, escalated alerts, approving reports
System administrators	Installation, configuration, users and permissions

---

2. The Problem

This section explains why Site Monitor exists: where manual certificate tracking breaks down, and which gap automated monitoring fills. It is the context you want if you are evaluating the platform or picking up the process from someone else.

2.1 Certificates Multiply Quietly

A modern organisation runs dozens — often hundreds — of active SSL/TLS certificates. They come from different certificate authorities, they are deployed across servers, load balancers and CDN layers, their validity ranges from 90 days to two years, and they belong to different teams. One missed expiry date is a customer-facing outage.

2.2 Why Spreadsheets Fail

If you have ever tried to track certificate expiry in a spreadsheet or a calendar reminder, you already know how it ends. It depends on someone remembering. Knowledge walks out of the door when people move on. Nobody ever checks the certificate chain or the revocation status. And there is no live view — you find out when customers complain.

2.3 What Changes

```
Reactive                          →  Proactive
──────────────────────────────────────────────────────
Find out when it expires             Find out 30 days ahead
Someone remembers to check           Automatic hourly scan
Nobody is quite sure who owns it     Ownership sits with a team
A tangle of email threads            Structured escalation
No record of what happened           A complete audit trail
```

---

3. What the Platform Does

This section gives you the end-to-end picture. Certificates are the core; each of the other monitor types is covered in detail in 10. Monitor Types.

3.1 Automatic Certificate Scanning

Site Monitor scans every active domain in the inventory once an hour. For each one it performs a real TCP and TLS handshake — so you see the certificate your server is actually serving right now, not a theoretical value from a register. A parallel worker pool gets through large inventories in minutes.

Every scan captures and stores:

Field	What it tells you
Subject / Issuer	Who the certificate is for and who signed it
Validity dates	Not Before / Not After
Days remaining	The number every alert threshold is measured against
SAN list	Every hostname the certificate covers
Chain status	Whether the intermediate chain is complete and valid
Revocation status	The verdict from OCSP, falling back to CRL
Trust status	Whether the chain terminates in a trusted root
Deployment status	Whether the served certificate matches the one you expected
Fingerprint and serial	SHA-256 fingerprint and serial number
Key and signature	Algorithm and key size
Key usage	Key Usage and Extended Key Usage extensions
Response time	How long the handshake took

Tracking a certificate from a file (6 October 2026). Certificates that cannot be reached over the network are tracked too: keystore / truststore JKS files on OpenShift, `.pem` files returned by a CA, PFX files with a completed chain. You upload the file from the **Uploaded certificates** page or through the **Add certificate from file** option of the "Add domain" button. Supported formats: PEM / CRT / CER (Base64 or DER), DER, P7B / P7C, PFX / P12 (with the password), JKS / JCEKS / BKS, a ZIP holding several certificates, and pasted PEM text. Do not upload a CSR (certificate request) or a private key on its own; upload the certificate the CA returned or the PFX / JKS with the completed chain. The upload is analysed: validity dates, subject / SAN, key and signature algorithm, chain completeness, trust status and warnings (expired, not yet valid, self-signed, weak key, CSR or private key found …). Several CA certificates in one truststore can be tracked in one go. Tracking is identical to network-scanned certificates: the same thresholds and criticality tiers, the same alert / escalation / notification flow, dashboard, warnings, renewal advice, forecast, reports and inventory fields. These records carry an "Uploaded" badge. Renewing means uploading a new version: tracking moves to the new certificate, older versions are never deleted and stay visible in the **Versions** tab of the certificate window (fingerprint, validity, uploader, whether the key changed, SAN differences, PEM download). When a file holds pieces of the same chain (root, intermediate, leaf), the certificate at the end of the chain is tracked as ONE record and the others are shown as its chain; the SSL tab of the certificate window draws that chain with the same cards as network-scanned certificates, and its "Hierarchy (browser style)" switch (also "View" on the Versions tab) shows it root-first like a browser, with the selected certificate's details and a per-certificate PEM download. The tracking name can be changed later from Edit (versions and history move to the new name). If a renewal uploads the same certificate as the current version, "Upload anyway" stores it as a new version; older versions can be deleted permanently from the Versions tab (the current one cannot). The file is opened in your browser: private keys and the PFX/JKS password never leave it, only the public certificates are sent to the server and only the public chain is stored. BKS cannot be opened in the browser; convert it to PEM with `keytool -exportcert -rfc` and upload that. Obtaining the certificate from the vendor stays outside Site Monitor; only the expiry is tracked here.

3.2 Chain and Revocation Checking

A certificate that has not expired can still be broken. Site Monitor validates the full chain, then asks whether the certificate has been revoked — OCSP first, CRL as a fallback. CRL responses are cached, so a slow distribution point does not drag the whole sweep down.

3.3 Deployment Compliance

If you record the fingerprint or subject you expect on an inventory entry, every scan checks the served certificate against it. This catches the classic failure where a renewal is issued but never actually deployed to one node behind a load balancer.

3.4 Per-Domain Proxy Routing

Some targets sit behind a WAF that refuses traffic from the monitoring pod. Rather than routing everything through a corporate proxy — which would break the checks that work perfectly well today — you flip a single switch on the inventory entry for that one domain.

3.5 Criticality Tiers

Every inventory entry carries a tier from 1 to 4: customer-facing production, internal production, UAT and pre-production, and development or sandbox. The tier drives sort order, the criticality badge on the card, and which contacts get pulled into an escalation.

3.6 Beyond Certificates

Certificate monitoring answers "is the lock sound?". The rest of the family answers "is the door open, and is what is behind it correct?" — HTTP, port, DNS, keyword, ping, page integrity, synthetic journeys and domain registration. Each has its own tab and its own schedule.

3.7 Alert Management at a Glance

An alert is not a one-shot email; it has a lifecycle:

Stage	What happens
Detection	A sweep finds a problem and confirms it over several consecutive checks
Alert raised	An event is recorded with a level, a type and an owning team
Notification	Email and, if configured, a Teams or Slack webhook
Acknowledgement	Someone marks it as seen, with a mandatory note; daily reminders stop
Reminder	Unacknowledged alerts are re-sent once a day
Resolution	The problem is fixed, the alert closes with a note, and a resolution notice goes out

3.8 Team Ownership

Everything belongs to a team: inventory entries, monitors, weekly reports and alerts. That single decision is what makes escalation work — an alert always knows who should be looking at it.

3.9 Renaming a Domain

When a domain is renamed, its entire history moves with it in one atomic operation. Checks, alerts, notifications and notes all follow, so you keep the trend line instead of starting a new one.

3.10 Directory Integration

Site Monitor authenticates against your local account store or against Active Directory over LDAP. Directory users are provisioned on first sign-in, complete with their manager relationship, which the escalation logic can then use.

3.11 Weekly Reports with Approval

Teams write a short weekly operations report; the product owner approves or returns it. Approval works from the screen or straight from a link in the email, and a reminder goes out on Friday morning for anything still outstanding.

3.12 Permissions and the SQL Playground

Access is governed by a permission matrix — a resource key crossed with an action — layered on top of system roles and team scope. Global administrators additionally get a read-mostly SQL console for the questions the screens do not answer.

---

4. Architecture and Technology

Site Monitor ships as a single container image. The React front end is served as static content from inside the Spring Boot jar, so there is no separate web server to operate, and PostgreSQL is the only system of record.

4.1 Back End

Layer	Technology
Runtime	Java 25 (LTS)
Framework	Spring Boot 4.1 (Spring Framework 7, Jakarta EE 11)
Persistence	Spring Data JPA over Hibernate 7
Database	PostgreSQL
Cryptography	BouncyCastle for chain, OCSP and CRL handling
DNS	dnsjava, which exposes TTL, response time and authoritative servers
HTML parsing	jsoup, for the page integrity resource inventory
Metrics	Micrometer, exposed for Prometheus
Sessions	Spring Session, persisted to the database
Passwords	BCrypt

Authentication is deliberately a custom interceptor rather than a full security filter chain. It keeps the request path short and the behaviour explicit, and it is why the single-active-session rule and the progressive lockout logic are straightforward to reason about.

4.2 Front End

Layer	Technology
Framework	React 18
Build	Vite 5
Charts	Recharts
Icons	Lucide
Dates	date-fns
Client-side export	jsPDF for on-screen PDF exports

The interface is a single-page application with no client-side router: the active tab lives in the query string, which is what makes every screen shareable as a link. Both languages and both themes are built in.

4.3 Concurrency and Performance

Checks run on a dedicated thread pool, sized by configuration, and are deliberately kept off the HTTP request threads. The HTTP thread ceiling is set lower than the framework default so that it stays in proportion to the database connection pool — an oversized thread pool simply queues on the database and wastes memory on stacks.


Long-running work never blocks a user. Manual checks are dispatched asynchronously, email delivery retries in the background, and expensive lookups such as CRL fetches are cached.

---

5. System Topology

This section shows how the platform sits in production and in local development. The production deployment is built around a **single pod**: roughly 100 concurrent users and 200 to 1,000 monitored targets are handled by one JVM, and you scale it vertically. Even so, nothing stateful lives in the pod's memory — sessions and scheduler locks go to the database — so a restart loses nothing, and moving to horizontal scaling later is a configuration decision rather than a rewrite.

5.1 Production on Kubernetes

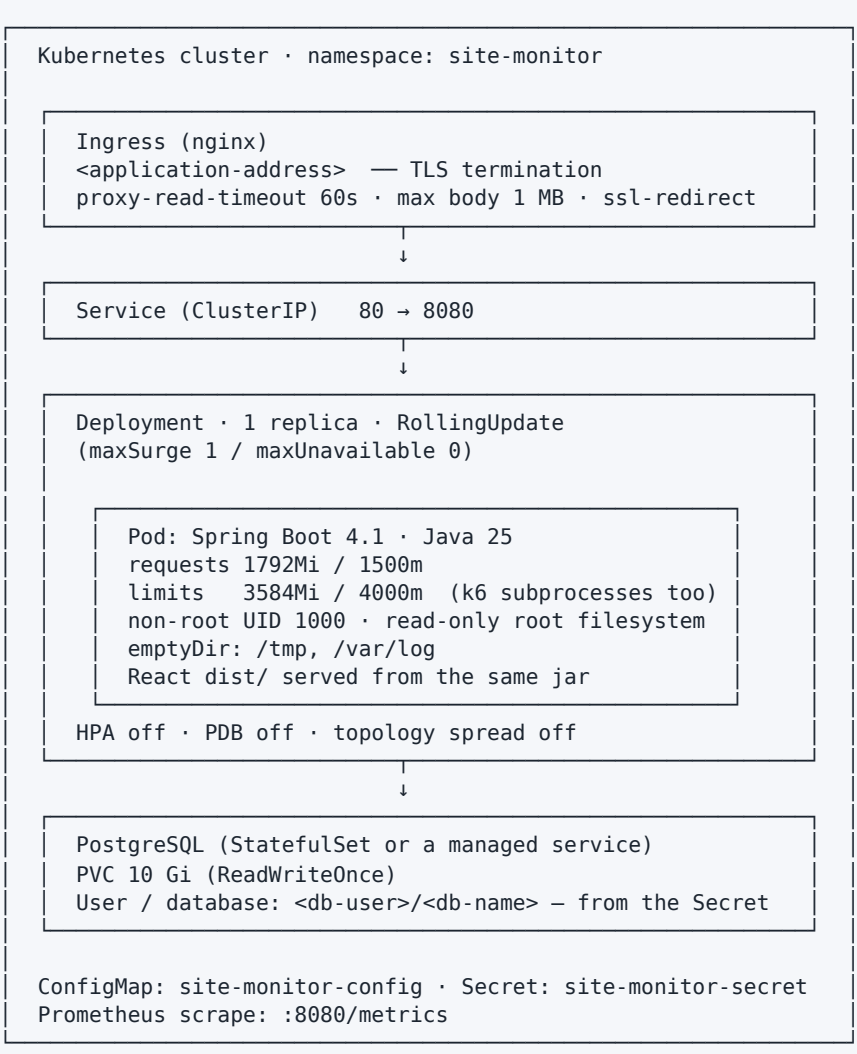

```
        |                    |                    |
        ↓                    ↓                    ↓
┌──────────────┐     ┌──────────────────┐     ┌──────────────────┐
|  SMTP        |     |  Corporate       |     |  Monitored       |
|  (alerts)    |     |  proxy           |     |  targets         |
|              |     |  (optional)      |     |  TLS/HTTP/DNS/   |
|              |     |                  |     |  ICMP/TCP/k6     |
└──────────────┘     └──────────────────┘     └──────────────────┘
```

The resource limits are not arbitrary. The memory ceiling is 3.5 GiB because synthetic monitoring launches k6 subprocesses outside the JVM on every run, and their resident memory sits on top of the heap. The JVM options size the heap as a percentage of the container limit and tell it to exit immediately on an out-of-memory error, so a pod that runs out of memory restarts quickly rather than hanging in a half-working state.

The database user and database name are environment-specific. The `<db-user>/<db-name>` values come from the `.env` file — from a Secret on Kubernetes — and are never baked into the code.

The chart also supports horizontal scaling: replica count, autoscaling, pod disruption budget and topology spread are all present and switched off. If you turn them on, the multi-pod behaviour described in 17. Resilience and Availability takes over; on a single pod those same mechanisms run harmlessly.

5.2 Local Development with Docker Compose

```
┌──────────────────────────────────────────┐
|  Docker Compose                          |
|                                          |
|   ┌──────────────────────────────┐       |
|   |  site-monitor:latest         |       |
|   |  Port: 8080                  |       |
|   |  Volume: ./data:/app/data    |       |
|   |  Read-only FS + /tmp tmpfs   |       |
|   |  Health: wget /health (30s)  |       |
|   └──────────────────────────────┘       |
|                                          |
|  Environment: the .env file              |
└──────────────────────────────────────────┘
```

5.3 The Distributed Scheduler Lock

If more than one pod is running, only one of them should be sweeping at any moment. Site Monitor uses a database-backed lock for this:

```
scheduler_lock table:
  name         → "cert-check"
  locked_by    → "<pod name>-uuid8"
  locked_until → expiry timestamp (TTL: at most 3 minutes, extended every 30 s while the job runs)

Flow:
  Pod starts    → stale locks from the same host are cleared
  Sweep is due  → INSERT INTO scheduler_lock (unique constraint)
    ├─ Success        → this pod runs the sweep and renews the lock every 30 s
    └─ Duplicate key  → another pod has it, skip
  Lock lost (renewal finds no row) → the sweep does not save its results
  Sweep ends / pod shuts down      → the lock is released
```

If a lock ever gets stuck, you can force-release it from the **System Health** screen. A long job renews its lock for at most 3 hours (4 hours for the nightly cleanup), so a hung job can never hold it forever.

Next to this lock, the monitoring sweeps (HTTP, port, ping, DNS, domain, …) are given to a single pod through **sweep leadership**: the pod holding a lease in the database (180 s, renewed on its own thread) runs every monitoring sweep and makes the alert decisions; when it shuts down it hands the lease over at once and another

pod takes over in about half a minute.

---

6. Database Schema

PostgreSQL is the single system of record. There are more than seventy tables; this section groups them by purpose so that "where is this stored?" has one answer. The column names are taken from the live schema, so you can use them directly in the SQL Playground.

6.1 How the Schema Evolves

There is **no Flyway or Liquibase** in Site Monitor. The schema moves forward through two mechanisms:

1. Hibernate's `ddl-auto=update` creates new entities and new columns.
2. A start-up routine applies idempotent `ALTER TABLE` and `CREATE TABLE` statements, swallowing "already exists" errors. Column widenings, indexes and the tables that have no entity arrive this way.

You need to understand the operational consequences of that choice. **There is no rollback** — roll a release back and the schema stays where it is (a surplus column is harmless, a missing one is not). `ddl-auto` will **never drop a column, rename one, or backfill a default**; those three are patched by hand. And on a large schema the first start-up after an upgrade spends real time validating and patching, which is why the pod's start-up probe budget is around 300 seconds.

Four tables are not managed as entities: the scheduler lock (raw JDBC), the daily and hourly rollup tables (native SQL), and the two session tables that Spring Session creates for itself.

6.2 Users, Teams and Permissions

Table	Purpose	Key columns
`app_users`	Accounts and the profile pulled from the directory	`username`, `password_hash`, `system_role`, `org_role` (+ `*_locked`), `team_id`, `auth_source`, `manager_id`, `lockout_until`, `permanent_lock`, `must_change_password`, `temp_password_expires_at`, `active_session_id`
`app_user_teams`	Multi-team membership	`user_id`, `team_id`
`teams`	Team definitions	`name`, `description`, `active`, `leader_id`, `email`, `weekly_reminder_enabled`, `weekly_availability_enabled`
`permission_grants`	Role × resource × action matrix	`role`, `resource_key`, `action`, `allowed`, `updated_by`
`password_history`	Prevents password reuse	`user_id`, `password_hash`, `created_at`
`remember_me_tokens`	Persistent sign-in tokens (7 days)	`token`, `user_id`, `expires_at`
`spring_session` / `spring_session_attributes`	Session store	Managed by the framework

6.3 Monitored Targets

Each monitor type has its own target table. The shared columns are `name`, `team_id`, `group_name`, `interval_seconds`, `timeout_ms`, `confirm_attempts`, `confirm_interval_seconds`, `recovery_checks`, `recovery_interval_seconds`, `active`, `notify_email` and `tags`.

Table	Purpose	Type-specific columns
`certificate_inventory`	The target list for certificate monitoring — there is no separate monitor table	`domain`, `port`, `tier`, `team_id`, `ug_team_id`, `use_proxy`, `tls_mode`, `expected_fingerprint`, `expected_subject`, thirteen operational flags, `deleted_at`
`http_monitors`	HTTP and website checks	`url`, `method`, `expected_status`, `follow_redirects`, `verify_ssl`, `check_ssl_errors`, `ssl_reminder_days`, `domain_reminder_days`
`port_monitors`	Port checks	`host`, `port`, `protocol`, `expect`, `send_data`, `ip_version`, `slow_threshold_ms`, `standalone`
`dns_monitors`	DNS record checks	`domain`, `record_type`, `expected_value`, `propagation_check`, `dns_change_alert_enabled`, `standalone`
`keyword_monitors`	Page content checks	`url`, `keyword`, `match_operator`, `match_count`, `alert_condition`, `case_sensitive`, `custom_headers`
`ping_monitors`	ICMP checks	`host`, `ip_version`, `packet_count`
`page_monitors`	Page integrity checks	`url`, `mode`, `crawl_depth`, `crawl_max_pages`, `exclude_patterns`, `slow_resource_ms`, `alert_third_party`, `alert_mixed_content`, `resource_concurrency`
`domain_monitors`	Domain registration checks	`domain`, `warning_days`, `critical_days`, `thresholds_csv`
`scripted_monitors`	Synthetic k6 journeys	`script`, `env` (encrypted), `timeout_seconds`, `slow_threshold_ms`, `use_proxy`
`scripted_script_versions`	Version history for k6 scripts	`monitor_id`, `script`, `created_at`, `created_by`
`scripted_drafts`	Editor autosaves	`monitor_id`, `user_id`, `script`, `updated_at`
`monitoring_groups`	Per-team monitor groupings	`type`, `name`, `name_lower`, `team_id`
`maintenance_windows`	Suppression windows	`all_monitors`, `targets_json`, `timezone`, `start_at`, `duration_minutes`, `recurrence`, `days_of_week`, `day_of_month`

6.4 Check Results

These append-only tables grow fastest and are the main target of the retention policy (see §15.8).

Table	Purpose
`certificate_checks`	Full certificate check history
`latest_checks`	One row per domain holding the most recent certificate result — this is what the screens read
`uptime_checks`	Availability measurements for inventory domains

Table	Purpose
`http_checks` · `port_checks` · `ping_checks` · `keyword_results` · `dns_records` · `domain_checks` · `page_checks` · `scripted_checks`	Raw results, one table per type
`page_resource_issues`	Resources that failed during a page check — only the problem ones are stored
`monitor_check_daily` / `monitor_check_hourly`	Daily and hourly rollups; the long-term trend survives here after raw rows are purged
`http_metric_minute`	The application's own per-minute latency and request counters
`system_heartbeat`	One health signal per minute
`activity_log`	The unified activity stream — one row per check, isolated by team

6.5 Alerts, Incidents and Notifications

Table	Purpose	Key columns
`alert_events`	Alert lifecycle	`domain`, `alert_level`, `alert_type`, `team_id`, `context_json`, `acknowledged` + `_by/_at/_note`, `resolved` + `_at/_by/_note`, `last_re_alert_at`, `realert_count`, `storm_id`, `cert_tier`
`alert_comments`	Comments on an alert	`alert_event_id`, `author`, `body`, `created_at`
`alert_thresholds`	Day thresholds	`warning_days`, `high_days`, `critical_days`, `re_alert_interval_hours`
`alert_storms`	Storm grouping	`scope_key`, `scope_type`, `member_count`, `root_cause`, `notified_teams`, `resolved`
`escalation_contacts`	Who gets notified	`user_id`, `email`, `role`, `min_alert_level`, `webhook_url`, `webhook_type`, `team_id`
`notification_logs`	Every delivery attempt	`alert_event_id`, `recipient_email`, `subject`, `email_status`, `webhook_status`, `trigger`, `sent_at`
`network_outage_events`	Bulk network failure events	`detected_at`, `error_rate`, `failed_count`
`incident_records`	The hand-written incident ledger	`title`, `occurred_at`, `detected_at`, `resolved_at`, `severity`, `status`, `category`, `rca_summary`, `business_impact`, `affected_app`, `sla_breached`, `duration_minutes`
`incident_images` / `incident_options`	Screenshots and dropdown options	
`login_anomaly_incident`	Failed sign-in anomalies	`opened_at`, `rule`, `resolved`

6.6 Settings, Reports and Operations

Table	Purpose
`app_settings`	Live settings — key and value, changeable without a restart
`smtp_settings` / `ldap_settings`	Mail and directory configuration; passwords encrypted at rest

Table	Purpose
`pinned_cas`	Automatically pinned certificate authorities, per host and port
`scheduler_lock`	The distributed scheduler lock
`retention_run` / `retention_run_item`	The nightly clean-up's own history — how many rows it removed from which table
`audit_log`	The security audit trail — hash-chained, with IP and geolocation
`monitor_change_log`	Monitor CONFIGURATION history — who changed which field, when, from which IP, with a full snapshot of every event (kept for 730 days)
`weekly_reports` / `weekly_report_images` / `weekly_report_mails`	Weekly report content, images and the archive of what was sent
`weekly_availability_log`	Idempotency record for the weekly availability email
`cert_inventory_report_log`	Delivery record for the monthly inventory report
`certificate_notes` / `certificate_note_revisions`	Per-domain notes and their edit history
`monitor_notes` / `monitor_guide`	Per-monitor notes and runbook content
`guide_links`	Links shown on the Renewal Guide screen
`diagnostic_runs`	History of diagnostic tool runs
`sql_query_history`	SQL Playground query history
`login_issue_reports` and related tables	Problem reports, screenshots and mail history

6.7 Deletion Is Permanent

Since 7 October 2026, deleting a certificate (network-scanned or uploaded from a file) or a monitor is always **permanent**; there is no bin and no restore. Deleting a certificate first closes its open alerts, then removes in one transaction its check history, latest result, notes, uploaded versions, the Port/DNS monitors derived from the inventory and their checks, uptime records, weak-algorithm exception and diagnostic history. Closed alert records, the audit log and the change history stay as a trace. A deleted record's name is free at once, so a new record can use it. To stop monitoring without deleting, switch "Active" off.

```
active     BOOLEAN       -- FALSE = paused (record kept, not monitored)
deleted_at VARCHAR(255)  -- legacy bin column; no longer written
```

When upgrading to this version, records still in the old bin are permanently deleted once at the first start and their names are written to the audit log.

---

7. The Certificate Check Pipeline

This section walks through what happens to a certificate during the hourly sweep. Knowing the pipeline is the quickest route to understanding why an alert fired and when.

7.1 The Full Flow

```
Scheduled trigger (hourly, configurable cron)
        │
        ▼
Acquire the distributed lock ─── already held? ──→ skip this run
```

```
        │
        ▼
Load active inventory domains
        │
        ▼
Fan out across the check thread pool
        │
        ├──→ Per domain:
        │      1. Resolve DNS; validate every resolved address
        │      2. Open a TCP connection (direct, or via the proxy if flagged)
        │      3. Complete the TLS handshake, capture the served chain
        │      4. Read the leaf: subject, issuer, validity, SAN, key, signature
        │      5. Validate the chain and check revocation (OCSP, then CRL)
        │      6. Compare against the expected fingerprint and subject
        │      7. Work out the days remaining and the status
        │      8. Write certificate_checks + update latest_checks
        │      9. Write an activity_log row
        │
        ▼
Was this a bulk network failure? ──── yes ──→ suppress individual alerts,
        │                                     raise one network outage event
        ▼ no
Evaluate alert thresholds per domain
        │
        ▼
Raise, re-alert or resolve alerts; notify the owning team
        │
        ▼
Release the lock
```

7.2 Bulk Network Outage Detection

If the proportion of network-class failures in a single run crosses a configured threshold — and at least a minimum number of checks failed — Site Monitor concludes that the problem is its own egress rather than five hundred separate servers. Individual certificate alerts for that run are suppressed and one network outage event is raised instead, with an email to the system administrator. This behaviour is deliberate; please do not "fix" it by alerting on everything.

7.3 Retry Policy

Only network-class failures are retried, and only once. SSL, DNS and certificate errors are never retried, because they are real findings rather than transient noise.

7.4 Catching Up After Downtime

If the application was down when a daily notification was due, the notification is not lost. On start-up, any of that day's outstanding daily alerts are sent immediately — without waiting for a network call — and the full sweep follows. However long the outage lasted, the day's notifications still go out.

---

8. Alerting and Escalation

An alert is a record with a lifecycle, not a single email. This section covers how one is born, who hears about it, and how it closes.

8.1 Alert Lifecycle

```
Problem detected
     │
     ▼
Confirmation: N consecutive failed checks (default 3)
     │
     ▼
Alert raised  ── level: WARNING / HIGH / CRITICAL
     │           type:  what kind of problem
     │           team:  who owns it
     ▼
Notification ── email + optional webhook
     │
     ├──→ Acknowledged (with a mandatory note)
     │      daily reminders stop, the alert stays open
     │
     ├──→ Not acknowledged
     │      one reminder a day until someone acts
     │
     ▼
Recovery: N consecutive successful checks (default 3)
     │
     ▼
Alert resolved ── resolution notice sent
```

8.2 Alert Types

Every monitor type raises its own family of alerts: certificate expiry, broken chain, revoked or mismatched certificates; availability failures for HTTP, ping and ports; DNS resolution failures and record changes; keyword conditions; page integrity problems; synthetic journey failures; and domain registration expiry. Twenty-eight distinct types are recognised and labelled throughout the interface.

8.3 The Escalation Matrix

Alert levels are driven by how many days remain:

Level	Default threshold	Who is told
WARNING	30 days	The owning team
HIGH	15 days	The team plus escalation contacts at that level
CRITICAL	7 days	The team, escalation contacts and management

Thresholds are configurable from the **Admin Panel**.

Escalation contacts are set up per team, and each contact only receives alerts for its own team. If none of a team's contacts matches the level, no escalation contact is added and the alert goes only to the team's own recipients (team address, notification group, push) — another team's manager or contacts are never added. Records with no team (unowned) send no notifications on any channel.

8.4 Recipient Routing

Who receives an alert depends on where it comes from as well as its level, and every path — the opening alert, daily reminders, escalation, resolution, manual resends and storm digests — follows the same rules:

- Standalone monitors (keyword, ping, HTTP, page, synthetic, page speed, domain, and Port/DNS monitors added by hand) belong to the team stamped on the alert when it opened. Every notification goes to that team only; the team is never taken from the certificate inventory.

- Certificate alerts, availability alerts and Port/DNS monitors derived from the inventory go to the inventory's SY and UG teams, and each of the two brings only its own escalation contacts (one email per address).
- The level rule is the same everywhere: at WARNING a standalone monitor notifies only its team; at HIGH and CRITICAL escalation contacts are added according to their own minimum level. Another team's contacts are never added, and an unowned record sends nothing.

8.5 Notification Triggers

Each notification records why it was sent: the initial alert, a daily reminder, a manual resend, or a resolution notice. You can see the trigger against every entry in the notification history.

8.6 What Acknowledgement Does

Acknowledging an alert stops the daily reminders. It does **not** close the alert — the problem is still there, someone has simply taken ownership of it. Closing happens either automatically, when the monitor recovers, or manually when you mark it resolved.

8.7 Alert Storm Grouping

When a lot of monitors fail at once — a shared network segment goes down, say — you do not want an email per monitor. Site Monitor tracks confirmed outages: if there is an active storm for the scope, new alerts join it, and once the threshold is crossed individual notifications are promoted into a single bulk notification. Individual alert records are still written per monitor, so history and uptime percentages are unaffected; only the notification is grouped. When the storm clears, one bulk recovery notice goes out.

Storms are assessed per team (29 September 2026). The threshold, the window count and the root cause are worked out only from the monitors of the team that **owns** the alert. The threshold is compared with the number of **different targets** (hosts): the availability, port and DNS alerts of one host count as a single target, and with a percentage threshold at least 3 targets are needed, so a single host failing in a small team is never treated as a storm. The summary notification (email, personal push and webhook) goes to that team alone. Another team's failures are never added to your storm, nor yours to theirs, and there is no organisation-wide "All monitors" storm notification. Each team sees only its own count, name and monitors. A storm push is resolved at the highest alert level among its members, so it never reaches a wider audience than the individual alerts would have (for instance, tiers that only receive critical alerts). An alert with no owning team never joins a storm. The 24/7 Monitoring Team receives a separate summary only for members whose monitor has 24/7 notifications explicitly switched on.

Optional: keeping push out of the storm (3 October 2026). By default personal push is handed over to the storm as well: while a storm lasts, member alerts aren't pushed one by one and the team gets a single summary storm push. If Settings → Alert Storm → "Don't hand push notifications over to the storm" is switched on, the storm groups email only (together with webhook and the 24/7 summary); every member alert's push — opening, level rise, daily reminder and resolution — goes out individually, in the order the alerts opened. The hourly push cap per user, team and personal quiet hours and system maintenance still apply in that mode.

A manual check never raises an alert or a storm. "Check now" on the monitor pages (a single monitor, or the bulk "Check Now (N)") only records the result: it won't open a new alert, escalate, re-alert or start a storm, and it doesn't advance an open alert's notification counters. If the result is healthy, an open alert can close under the normal recovery rule (the resolution notice goes only to people who were notified when it opened). If a manual check fails, the alert is raised by the next scheduled check under the usual confirmation rules. A manual check also won't send a domain threshold reminder, won't trip the synthetic monitor anomaly guard (it never switches a monitor off) and doesn't use up change detection for DNS or domain registration data (nameservers, registrar, EPP, DNSSEC): the scheduled check still sees the new value as a change against its own baseline and raises the alert.

A domain's Registration tab shows the stored data when it opens; a live lookup only runs when you press "Refresh". A bulk check only covers monitors you're allowed to run; a team-scoped administrator can't run another team's monitors.

The feature is on by default and managed from **Settings → Storm**:

Setting	What it controls
Threshold unit	A count, or a percentage of the team's active monitors
Threshold value	How many simultaneous outages declare a storm
Window (minutes)	How close together outages have to be to count as simultaneous
Per group	Whether storms are evaluated within each of a team's monitor groups rather than across all of the team's monitors
Retention (days)	How long closed storm records are kept

Only "down"-class alert types are counted, so time-based alerts such as expiry warnings never create a storm.

There is a second, independent suppression layer: **bulk network outage detection**. If the error rate in a sweep crosses its threshold and enough checks failed, Site Monitor decides the fault is its own egress rather than the targets. Individual certificate alerts for that run are suppressed and a single network outage event is raised instead. This is the right answer — when the pod loses its internet connection, one "egress is down" alert beats five hundred "certificate unreadable" alerts.

8.8 The Second Daily Check for Critical Domains

The level of a domain expiry alert mirrors the card status exactly: below the critical threshold it is CRITICAL, between critical and warning it is WARNING. On top of the morning sweep, a second sweep every afternoon re-checks only those domains that have already entered the critical band. A domain renewed that same day therefore has its alert closed without waiting until the next morning, while daily de-duplication still stops a second notification going out for one that is genuinely still critical.

---

9. Notifications

Site Monitor delivers over email and, optionally, a chat webhook. Every attempt on both channels is logged, so "did anyone actually get told?" is always answerable.

9.1 Email Design

Alert emails are built to survive corporate mail clients, which is a harder constraint than it sounds — Outlook on the desktop renders with the Word engine and ignores a good deal of modern CSS. The templates therefore use table-based layouts, solid colours and inline images referenced by content ID, so they render the same whether or not remote content is blocked.

Every alert email carries the domain, the level, the type, the days remaining, the detail table and a direct link to the relevant screen. Resolution emails come with the "back to green" branding, the total outage duration in a compact form, and a clear start-to-recovery window.

Alert and resolution emails both include a short **"why did I get this?"** block naming the team the notification is registered against. It is there for trust: a recipient who can see why a message reached them is far less likely to treat it as phishing.

9.2 Webhooks

Email is not the only channel. Alongside an email address, each escalation contact can carry a webhook:

Platform	Format	Note
Microsoft Teams	MessageCard	The card colour follows the alert level
Slack	Slack message payload	Select `SLACK` as the type on the contact record

Webhook deliveries land in the same audit trail as email: every attempt appears in the notification log with its recipient, subject and outcome. The timeout is ten seconds, and a failed webhook never blocks the email — the two channels are independent.

9.3 The Weekly Availability Email

Every active team that owns certificates receives a summary of its domains' availability for the previous full week (Monday to Sunday) on Monday morning. It goes out whether or not there were outages, with any affected domains highlighted. It is addressed to the team mailbox, with the team's PO, escalation (TECH) and manager (MANAGER) contacts copied in; the C-level contact is left off the routine summary.

A **detailed outage report is attached as a PDF**: every outage of the week, with charts and status colouring, and the email body announces the attachment explicitly. Managers read the summary in the body and find the detail in the attachment.

Delivery happens at most once per team and per week — a second email for the same week never goes out, also when several pods are running. Each team is claimed separately: one team's failure does not stop the others. If the main run is missed or cut short (a pod shut down, the database was unreadable), a catch-up round at 25 minutes past each hour on the same day mails the teams not yet tried this week. A team that failed, and a team counted as "skipped" while the email channel was off (no longer "sent"), are retried by a manually triggered run. If a pod shuts down in the middle of a send, that team shows as "interrupted" (the email may have gone out); the scheduled run does not send it again, only a manually triggered run takes it over. A manual run (`POST /api/admin/system/weekly-availability/run`) mails only the teams **not yet sent** this week — to deliberately send one team the email again, use the test send in Settings with the team's address. Configure it under **Settings → Weekly Availability**, where you can also review past sends, preview the next one, download the outage PDF on its own, and send yourself a test.

9.4 Email Configuration

Mail can be configured from environment variables at start-up, but after installation it is far more practical to manage it from **Settings → SMTP**: changes there are written to the database, take effect without a restart, and the screen can send a test message to prove the settings work.

9.5 24/7 Monitoring Team (NOC) Notifications

Many organisations have a 24/7 monitoring team (NOC) that watches screens round the clock and **phones** the team responsible when something goes wrong. If an outage happens overnight or at the weekend while the team is asleep, the NOC only knows about the monitors that notify it. Site Monitor builds that bridge by e-mail:

- **Opt-in per monitor:** every monitor type and the certificate inventory have a "Notify the 24/7 monitoring team" switch — **off by default**. When it is on, the same alert that produces the team e-mail also e-mails the NOC groups.

- **NOC groups:** e-mail lists defined under **Settings → 24/7 Monitoring Team**, independent of teams (1–50 addresses per group; active / default; a test e-mail button). If a monitor doesn't pick a group, the e-mail goes to the default groups, or to every active group if there is no default.
- **Per-type switches:** if an administrator switches a type off (Ping, say), NOC e-mails stop for EVERY monitor of that type — even monitors that are opted in.
- **Rules:** only alerts at or above the chosen level go out (default: critical only). Team quiet hours, level thresholds and personal mutes don't affect the NOC; maintenance windows and the global e-mail switch do. There is one opening e-mail per alert, and a "RESOLVED" e-mail follows if the opening one went to the NOC (this can be switched off). During a storm or mass outage the NOC, like the team, gets a single combined e-mail.
- **What the e-mail contains:** the subject is `[Site Monitor] [7/24] <LEVEL> — <target> — <Team>`; the body covers what happened, the owning team, the **call list** (name · job title · tappable phone number, read live from Active Directory), the team manager, escalation contacts, the call instructions and a link to the monitor. The mail log files it under the `NOC` category.
- **24/7 monitoring teams (4 October 2026) and operators:** in Settings → 24/7 → "24/7 monitoring teams" one or more teams are selected (global administrators only; the change is audited and a preview shows who will become an operator before saving). Active members of those teams become 24/7 operators **without any role change**: they get **read-only** access to every team's monitors, alerts, incidents, maintenance windows, status page and storms, and can add call logs (`noc_calls.write`) and notes to any alert. Acknowledging, resolving, re-notifying, editing monitors or inventory and acting on incidents stay limited to their own teams; the audit log, system health and administration screens stay closed. When a team is removed from the list the access goes away within 30 seconds, without logging in again. The previous set-up keeps working: an **AUDIT** user with `noc_calls.write` is also an operator (the permission is on for AUDIT by default; a permission an administrator deliberately switched off on the **Permissions** screen is left alone).
- **24/7 console:** operators see the organisation's open alerts and recent notifications on the 24/7 tab (`?tab=noc`): channels, when it reached 24/7, the last call (who, when, outcome). Filters: team, level, type, "sent to 24/7", called / not called, 1 h / 24 h / 7 days. "Call" opens the owning team's call list (order, name, phone), its manager, escalation contacts and instructions together with the call log form. Alert History also has a "sent to 24/7" filter and a "24/7 · hh:mm" badge, and the alert details' notification log marks the 24/7 email as "delivered to the 24/7 team".

The **24/7 Coverage** screen shows which monitors don't reach the NOC (see §14.31); the warning strip on the dashboard takes you there.

9.6 Personal Push Notifications

Personal push sends the alert straight to your phone through the organisation's notification gateway; it is a second channel, completely independent of e-mail. Because the push app is read outside the corporate network, messages are plain text and **contain no links** — open Site Monitor for the details. Administrators manage the channel under **Settings → Webhook Notifications**; you set your own preferences on the **My Activity** page.

My notification preferences (My Activity). Next to the "opt out of push" switch and your personal quiet hours:

- **Snooze:** one tap snoozes push for 1 hour, 4 hours or until 08:00 tomorrow (Istanbul time), and "Stop snoozing" switches it back on at once. The card shows the state, for example "Snoozed until 14:30". With **Still send critical alerts** (on by default), only CRITICAL alerts arrive while you are snoozed.
- **Lowest level:** All / High and above / Critical only. Alert pushes below it are not sent to you.
- **Monitor types:** choose which monitor types (certificate, HTTP, DNS…) you want pushes for; at least one must stay selected.

- **Push language:** Turkish or English. The template, the level word and the duration and date formats follow your choice; the alert's own description may stay in Turkish.
- **Send me a test push:** sends a test push to you only, in your language, regardless of your preferences, and shows the result (sent / gateway not configured / HTTP code). At most 3 attempts per 10 minutes.

If you set no preferences, everything works exactly as before. An alert's **resolved** push is not affected by your preferences or a snooze if you received the opening push — the alert on your phone still closes. Sign-in code pushes aren't affected either.

My push notifications (My Activity). Lists every push sent to you — and every one that wasn't — over the last 7 or 30 days, grouped by day: the time, the alert (target, type, level, team), the status (Received / Queued / Summarised / Not received), the **reason** if it wasn't received ("Push was snoozed", "Hourly push limit reached", "System maintenance" …) and the text you actually got. The chips at the top summarise the period (received, not received, summarised, the most common reasons) and the All / Received / Not received filter narrows the list. Event-level decisions for alerts of teams you belong to are listed too ("Your team's alert — no push was sent: handed over to the alert storm"); other teams' alerts never appear, and a row for an alert you can no longer see stays as "Another team's alert" without its target. Sign-in code pushes are never stored, for security, so they are not listed. On a phone the list switches to cards.

Hourly-limit summary. Notifications over the per-person hourly push limit (30 by default) are no longer lost silently: **15 minutes** after the first overflow (Settings → Webhook Notifications → Hourly limit; 5–120 min) you get one summary push — "Site Monitor: 14 notifications were held back by the hourly limit (3 critical, 11 warning). Latest: site-x - CRITICAL (14:05). Details in Site Monitor." At most one summary per person goes out per interval, and the summary itself is never held back by the limit. While your quiet hours or a snooze are running, the summary waits until they end (it goes at once if it contains a critical alert your rules let through); opting out of push or a system maintenance mute records the summary without sending it. Administrators can switch on **Critical alerts bypass the limit** so that CRITICAL alert pushes are never held back (off by default). In the delivery log, summarised rows link to their summary and the summary lists the rows it covers.

Escalation step push. A timed escalation step (see §8.3) also reaches the delayed contact by push, next to the e-mail and webhook, when the contact record is linked to an application user or its e-mail matches an active user. The text reads "[ESCALATION · 15 min unacknowledged] site-x is not responding …", in the person's language. With no match no push is sent and the reason is written to the delivery log. When the e-mail matches several active accounts of the same person, only one of them gets the push (see "Two accounts of the same person" below); when the address belongs to different people (a shared mailbox), it is unclear who should get it and no push is sent. The person's preferences, the hourly limit, system maintenance and the inactive-account rule all still apply. Administrators can switch it off with **Escalation steps also push to the contact**.

Two accounts of the same person. Active accounts with the same e-mail address (case and leading or trailing spaces don't matter) whose display names name the same person count as the same person and get only **one** push per notification. When names are compared, Turkish letters and accents, anything in parentheses and words containing digits (such as employee IDs) are ignored: "Emre Gökoğlu MP60146" and "EMRE GÖKOĞLU N60146" are the same person. Different people who share a mailbox (for example "Ayşe Yılmaz" and "Mehmet Demir") are never merged; each gets their own push. The corporate gateway maps both employee IDs to the same phone, so the same push used to show up twice. The account that gets the push is chosen only among accounts that **can receive it**: an account that already got this notification; otherwise the accounts not held back by opting out of push, the lowest level, monitor types, snooze or quiet hours — first those under the hourly limit, then the account that got the earlier notifications of the same alert (for example the opening, so escalation, the daily reminder, the storm reminder and "resolved" follow it), then the account that signed in most recently (on a tie, the oldest account). If none of the person's accounts can receive it, nothing is merged and each account's row shows its own

reason. The other account shows in the delivery log, the alert detail and My push notifications as **"Decided for another account of the same person; this account was not sent a separate push"** with the username of the account the decision was made for (the e-mail is never shown); that account's own row shows whether the person was reached. This row doesn't count toward the hourly limit. When a person is deliberately left out of a notice (for example the weekly report manager, who gets their own push, or the person who sent the report), their other account gets **"Another account of the same person was left out of this notice"**. The on-call push is not sent a second time when any of the person's accounts really received the team push (skipped rows don't count). The hourly-limit summary is per person too: the held-back notifications of both accounts go into one summary, sent to an account that can receive it. The rule covers alert, storm, on-call and escalation-step pushes, team notices (weekly report, TLS grade, technical error report) and direct pushes (weekly report manager, technical error report approval and outcomes). Accounts with an empty e-mail are never merged, inactive accounts get no push anyway, and a sign-in code push goes only to the account that asked for it. The re-notify confirmation and the "Who receives it?" view show the same decision before anything is sent.

Administrator view. The **Notifications** tab in the user details shows the person's push preferences read-only; an administrator can only clear an active snooze (this is audited). **Settings → Webhook Notifications → Templates** has Turkish and English tabs, each with its own preview, plus a separate English title; the test send uses the selected language. The webhook push delivery log labels the new triggers (hourly-limit summary, escalation step), shows skip reasons in plain language and marks English messages with an EN badge.

9.7 Alarm Forwarding

Sometimes another team needs to hear about a team's alarms too: the team that builds the application, the team that runs the infrastructure, or an operations team. **Alarm forwarding** is for this: the team that owns a monitor sends its alarms to another team, or to selected members of that team, as **extra recipients**.

- **Where: Admin → Notifications & Alerts → Alarm forwarding.** The screen has count tiles (total, active, paused, expired, needs attention), search and filters; a table on wide screens and cards on phones. In a monitor's detail window (all 10 monitor types and the certificate window) the **Forwarding** pill in the header shows who the monitor's alarms are forwarded to and offers an "add forwarding for this monitor" link. The row menu on the **Teams** screen also links to **Alarm forwarding**.
- **Who adds it:** only those who can **manage the team that owns the monitor** (global admin, the team's scoped admin, team admin). The receiving team cannot request a forwarding; it sees the forwardings it receives read-only in the **Forwarded to us** section and cannot end them. People can turn off unwanted pushes in their own push preferences. Someone who can see a team's monitors through access sharing cannot see or change that team's forwardings — alarm routing is never shared.
- **Scope: All monitors** (every monitor of the team, including ones added later), **Selected types** (e.g. HTTP and Ping; "Certificate" covers the certificate and availability alarms of the inventory record; monitors added to that type later are forwarded too) or **Selected monitors** (one or more specific monitors, up to 200).
- **Recipient: The whole team** (the team's alarm address — the default notification group, otherwise the team e-mail — and the team's own push rules) or **Selected members** (up to 50 active members of that team; a member who leaves the team or becomes inactive stops receiving from that moment).
- **What they get:** recipients get **whatever the owner team gets**: opening, level escalation, daily reminder, resolution and manual resend (the resend window lists forwarding recipients as separate rows, which can be removed). There is no separate level or event setting; the owner team's quiet hours (a deferred alarm reaches the recipient as a digest together with the owner's), storm grouping (the recipient gets a storm e-mail listing only the alarms forwarded to it), the monitor's disabled e-mail / push channel and system maintenance apply to recipients too. The owner team's escalation contacts, on-call person and 24/7 notifications are not forwarded.

- **Separate e-mail:** recipients get the same content as a **separate e-mail**; the owner team's addresses and contacts are not visible. The e-mail starts with a band: "This alarm belongs to a monitor of team X; it was sent to you through an alarm forwarding set up for team Y". An address never gets the same notification twice. The resolution e-mail goes only to addresses that actually received the opening. Push follows the same rules (prefixed "From team X:"); the same person never gets a second push for the same phase.
- **View access:** if **Also give view access** is ticked in the forwarding window, the receiving team (or the selected members) also gets read-only access to the owner team's monitors (an access share, managed on the **Access sharing** screen). Otherwise recipients only get the notification; the link in the e-mail may show them "no access".
- **Info e-mail:** when a team or a person is added to a forwarding, the recipients get a one-time info e-mail (and push). Nothing is sent on removal.
- **Pausing and end date:** a forwarding can be paused or given an end date; it stops by itself at the end of that day. When a team is deleted, the forwardings it owns and the ones it receives are deleted too. When a team's assets are moved to another team, its forwardings move with them; forwardings whose scope is **All monitors** or **Selected types** are moved **paused** (otherwise they would also cover every existing monitor of the target team) — review them in the target team and switch them back on. The delete / move window says so beforehand. Switching a paused forwarding back on sends the info e-mail to the recipients again; a forwarding created paused sends no info e-mail until it is switched on. An access share opened with **Also give view access** is not removed when the forwarding is deleted; remove it on the **Access sharing** screen.
- **Where it shows:** forwarded e-mails appear with a **Forwarding** badge in the alarm's notification history; in **Who gets notified?** under **Forwarding recipients**; and the MAILS column of the alarm feed given to the central monitoring team includes the forwarding recipients' addresses.

10. Monitor Types

Certificate monitoring answers "is the lock sound?"; the types in this section answer "is the door open, and is what is behind it correct?" Each has its own tab under the **Monitoring** group, runs on its own schedule, and belongs to a team — alerts and reports follow that ownership. You add a monitor with the **+ New Monitor** button on the relevant tab, and every form comes with a built-in guide for that type.

Common behaviour: the check interval runs from 30 seconds to 24 hours; an alert requires a number of consecutive failures (the confirmation count, 3 by default) and a recovery is declared after the same number of consecutive successes; you can pause a monitor with the "Active" switch instead of deleting it; and monitors can be clustered with a group label from **Settings → Monitor Groups**. Default intervals, timeouts and slow-response thresholds for new monitor forms come from the `frequency` group under **Settings → General**.

Each type stores its targets and results in its own tables and raises its own alerts. This table is the single answer to "where is this stored, and what will it alert on?":

Monitor type	Target table	Result table	Alert types raised
Certificate	`certificate_inventory`	`certificate_checks` + `latest_checks`	Expiry, broken chain, revoked, mismatch
HTTP / Website	`http_monitors`	`http_checks`	Unreachable, SSL error, domain expiry
Port	`port_monitors`	`port_checks`	Port down, slow response
DNS	`dns_monitors`	`dns_records`	Resolution failure, record changed, unexpected value, inconsistent propagation, slow query

Monitor type	Target table	Result table	Alert types raised
Keyword	`keyword_monitors`	`keyword_results`	Keyword condition failed, slow response, SSL error, domain expiry
Ping	`ping_monitors`	`ping_checks`	Unreachable
Page integrity	`page_monitors`	`page_checks` + `page_resource_issues`	Page unreachable (critical), page integrity (high)
Domain registration	`domain_monitors`	`domain_checks`	Expiry, unknown, status code, registration changed
Synthetic (k6)	`scripted_monitors`	`scripted_checks`	Journey failed, slow run
Database query	`dbquery_monitors` (+ `db_connection_profiles`)	`dbquery_checks` (+ `dbquery_alert_rows`)	Query failure, threshold (warning / critical), slow query
Status	`certificate_inventory` (no separate target)	`uptime_checks`	Accessibility

If you want to switch off alerting for a whole type without deleting the monitors, the `monitoring` group under **Settings → General** has a per-type alert switch that silences notifications while the checks keep running.

Failure diagnosis and end-to-end diagnosis for every type (5 October 2026). When a Ping, Port, DNS, Page integrity, PageSpeed, Status, Domain registration or certificate check fails, the reason is recorded too: ICMP not available here, name not resolved (NXDOMAIN / SERVFAIL / no record), connection refused, timeout (firewall), proxy refused or port not allowed by the proxy, TLS handshake / trust / name mismatch, HTTP error status, expected banner not received, broken / timed-out / insecure resources, registry did not answer, and so on. A failed row in the check history shows a reason badge and a one-line explanation; expanding it shows "Why / Impact / What to do", the recorded details (phase, route, resolved IP, response code, timeout …) and the raw error with a copy button. In DNS history a failed lookup no longer looks like "no change": it has its own state and filter. Rows from before this date are shown with the closest reason derived from the error text and carry a "details not recorded" note. Ping, Port, DNS, Page integrity and PageSpeed have **End-to-end diagnosis** in the details header (and on a failed row): for Ping, DNS → ICMP → TCP liveness probes (optional traceroute; tells "ICMP blocked but host alive" apart); for Port, DNS → TCP → TLS / HTTP / banner / UDP, with a direct vs proxy comparison when a proxy is configured; for DNS, every resolver and authoritative name server queried separately (response code, answers, TTL, DNSSEC); for Page integrity and PageSpeed, the same diagnosis as HTTP plus the resource problems or the DNS / connect / TLS / server / download timings next to the thresholds. Diagnosis writes no check row and raises no alert; users who can operate the monitor and hold `diagnostics.run` can run it. Domain, Status and certificate diagnostics are now open to everyone with the same permission and team rights, not only administrators.

10.1 Status Monitoring

The **Status** tab gives you an HTTP availability snapshot of the domains in your certificate inventory on one screen: state, response time, uptime percentage and last check time. You can open a diagnostics window per domain to run network, OpenSSL and HSTS tools. Domains inside a maintenance window are excluded from the uptime calculation, so planned downtime does not distort the figure.

10.2 HTTP and Website Monitoring

Watches whether a URL is up and returning the status code you expect. You configure the method (GET, HEAD or POST), the expected status (patterns such as `200`, `2xx` or `200-399`; blank means 200–399), redirect following and the request timeout. TLS verification is off by default — you are measuring availability, and internal or self-signed certificates should not get in the way — but switching it on turns an invalid certificate into an alert. You can also add optional SSL and domain expiry reminders.

When should you use it? Whenever you need to know that a service is reachable from outside and answering correctly. You might check your payment API's health endpoint once a minute with `GET /health` and alert your team after three consecutive non-`200` responses — so that you find out before your customers do.

10.3 Port Monitoring

For services with no URL — SMTP, databases, bespoke TCP services — monitored by host and port. There are five check types: TCP (is the port open), TLS (does a handshake complete and a certificate get presented), HTTP(S) (status code), BANNER (look for a substring in the response, such as `220` or `SSH-2.0`) and UDP. You can set a slow-response threshold and choose the IP version.

When should you use it? When you need to prove a non-web dependency is alive. Monitoring port 25 on your corporate SMTP server in BANNER mode expecting `220` catches the case a plain TCP check cannot: the port is open but the SMTP service itself has hung.

10.4 DNS Monitoring

Watches that a record (A, AAAA, CNAME, MX, TXT or NS) still resolves and that its value has not changed. Queries go out from the monitoring server without caching, and the query timeout is configurable. Three capabilities stand out:

- Expected-value locking: you enter one value per line, and anything in the live answer that is not in your expected set is flagged as possible DNS hijacking. A "pin current value" button fills the list from the live answer in one click.
- Change alerting: when a record value changes, an alert is raised. It does not close automatically and is reminded daily. If every new value is already in your expected list — a known internal-to-external IP switch, for instance — no alert is raised.
- Propagation checking: the record is compared across several public resolvers, and a disagreement between at least two of them is flagged as inconsistent.

When should you use it? Anywhere a domain silently pointing somewhere else would be a catastrophe. Lock the A record of your internet banking domain to its expected IP, and if it flips to an unknown address overnight, the alert is waiting for you before the morning traffic starts.

10.5 Keyword Monitoring

Checks whether a specific piece of text appears in a page's body — and how many times. The count condition is flexible: at least, at most, exactly, more than or fewer than. Case sensitivity is optional, and custom HTTP headers plus a `{timestamp}` placeholder in the URL are supported for cache busting. The default interval is one minute.

When should you use it? To catch pages that return HTTP 200 with broken content. Set a condition of "exactly 0" for the text "Under maintenance" on your home page: if the maintenance page is accidentally left in production, you get an alert even though the status code is perfectly healthy.

Failure diagnosis and end-to-end diagnosis (4 October 2026). Every check records the final address (masked), the number of redirects, the content type, the size, whether the 2 MB read limit was hit, the charset and the route (proxy / direct). A failed check shows a reason badge and a one-line explanation in the check history (keyword not found, HTTP error status, timeout, DNS, TLS, proxy, read limit …); expanding the row shows "Why / Impact / What to do", the recorded details, likely causes (login page, WAF / block page, page rendered by JavaScript, case / whitespace / HTML entity / charset difference, maintenance or error page, redirected to another site) and a masked excerpt of the page's visible text. **End-to-end diagnosis** in the details header (or "Diagnose this check" on a failed row) runs the same diagnosis as HTTP monitoring: DNS, connection / proxy, TLS, request and response headers, redirects, a curl transcript, a proxy vs direct comparison and a keyword analysis (match count, highlighted contexts, alternative readings). Diagnosis writes no check row and raises no alert; users who can operate the monitor and hold `diagnostics.run` can run it.

Richer matching, rules and content change (5 November 2026). Matching now handles Turkish letters correctly (İ / ı and I / i count as the same letter) and detects the page's character set (for example windows-1254) by itself, so an existing monitor's result may change after this release. In "Match settings" you choose whether to search the page's raw HTML or the visible text, and you can normalise whitespace. "Advanced request" adds a POST request with a body, Basic auth (the password is write-only and never shown), a browser-like or custom User-Agent, accepted status codes (off by default — when on, a page that returns 503 alerts even if the keyword is found), an expected final address and redirect following. Do not put a password in the body: it is stored as plain text. A saved password and custom headers are only sent to the monitor's own address; if you move the address to another server you must type the password again.

The condition block is a rule editor: define up to 10 rules and require all of them (AND) or any one (OR). Each rule is plain text or a regular expression (the safe RE2 engine), can be limited to part of the page (a CSS selector or a JSON path) and carries a warning and a critical threshold; when the critical threshold is crossed the alarm opens at critical level. You can also set a lower and upper page size. With **content change** on, Site Monitor keeps the text of the page (or the selected part) as a baseline; when the content drifts from it, a "Content changed" alarm opens and the mail lists the removed and added lines. Masking numbers and dates ignores fields that change every second. The baseline is taken automatically by the first successful scheduled check; in the detail window's "Content" tab you can take a new baseline or reset it, and look at the match count and page size chart and the live match contexts. An error page (4xx / 5xx) or an empty response never counts as a change. The form warns you when another monitor watches the same address. You can write the alarm mail's subject yourself with placeholders (for example `{name} · {reason}`). For pages that need a login or are drawn by JavaScript, "Convert to a synthetic monitor" turns the monitor into a ready k6 scenario (passwords are not carried over and must be entered again).

10.6 Ping Monitoring

Sends ICMP echo packets to a host and measures round-trip time and packet loss. Packet count (1–10, default 4), IP version and timeout are configurable. Some networks block ICMP altogether — for those targets a TCP port check is more reliable — and in a locked-down environment without ICMP permission the result is reported as not applicable rather than as a failure.

When should you use it? When you want pure network reachability, independent of any application layer. Ping your branch router and read a creeping round-trip time on the chart as an early sign of link saturation.

10.7 Page Integrity Monitoring

Not about the page itself but about the pieces inside it: every resource extracted from the HTML — images, stylesheets, scripts, iframes, fonts and links — is verified individually over HTTP. There are two modes: single page, and site crawl (depth 0–5, up to 500 pages, with exclusion patterns).

The definition of "broken" is deliberately narrow: 404 and 410, any 5xx other than 503, and a connection that cannot be established at all. Ambiguous codes such as 401, 403, 429 and 503 are recorded as inconclusive and raise no alert, because a WAF or bot filter may well serve them to us while working perfectly in a browser. A failed HEAD is confirmed with a GET and retried once.

A single broken resource marks the page as degraded and opens a high-severity page integrity alert; the alert closes automatically when the resource recovers. Mixed content — an `http://` resource on an HTTPS page — is alerted on by default. Third-party resource alerts are off by default, to keep external CDN noise out of your inbox.

Resource analysis. The **Resource analysis** tab in the monitor's detail window downloads the page and every object it loads (stylesheets, scripts, images, fonts, media, iframes) from the server when you ask for it, and checks the linked documents and other links too. It does not affect the monitor — it writes no check row and raises no alert or notification. Anyone allowed to "Check now" can start it and cancel it while it runs. The result shows a grade out of 100, the three things that lower it most and each component's full-score / zero-score limits, prioritised recommendations ("Show objects" opens the full list of the objects concerned), the page weight, an estimated load time, the share of images and the measured compression gain, third-party domains and an estimated waterfall. Objects can be filtered by type, size, finding and scope; clicking a row shows its final address, where it was found, its response headers and its findings. "Unverified" (for example 403 / 429 or a WAF block) and "Not loaded" (a video that does not autoplay) are not problems; the broken verdict is the same as the page integrity monitor's. Summaries are kept for one year and object details for the latest 20 analyses; two analyses can be compared side by side (added, removed and grown objects, new and resolved recommendations). The share link opens the selected analysis and view; if the analysis finishes while the window you started it from is closed, a notice with an "Open" button appears; the result can be exported to Excel and PDF. Method: the measurement runs on the server without executing JavaScript; the load time is an estimate based on six parallel connections and may differ from what a browser or Lighthouse reports. **Deep analysis (2026-11):** the result has four category scores (performance, security, SEO, accessibility) and an **Audit** section with six areas: loading and network (render-blocking resources, an estimated first paint, resource hints, connection cost per host, HTTP version, network profiles), waste and caching (duplicate and unminified files, exposed source maps, cache lifetime, repeat visits), images and fonts, security (security header score, SRI, cookie flags — cookie values are never shown —, libraries with known vulnerabilities, third-party categories and a privacy note), SEO and accessibility (colour contrast is not measured). Estimated and heuristic results are marked with a badge. A **performance budget** can be set per monitor (page size, request count, JS and image size, load time, grade, security score); exceeded, met and unmeasured limits are shown above the analysis — it raises no alert. The **Trend** view shows 30 / 90 / 365-day grade, load-time and category charts and the fastest-growing objects. **Analyse the site** scans several internal pages of the same host in one go (shared objects are downloaded once, and while it runs you see which page it is on); the "Pages" view lists the worst pages and the shared resources. The PDF starts with an executive summary, and the Excel file gains an executive summary and audit sheets. **Image tool (2026-11):** the **Download** menu next to every image the analysis found offers the original file, an optimised copy at the same size, or a resized + optimised copy (at a suggested width based on the size the page declares, with the reason shown); afterwards the row shows the real before → after size and the saving. The Site Monitor server fetches the image from the monitored site (so only people allowed to "Check now" can download; images with a masked address, SVG files and images over 25 MB cannot be downloaded and the menu says why), while compression and resizing run in your browser. "Optimise the large images and download (ZIP)" delivers all large images in one archive, together with a mapping list from old address to new file and the reasons for any image that could not be fetched. In the **Image tool** section you can also process your own files (up to 30 images of up to 25 MB each) by dragging, choosing or pasting them: you pick the output format (same / JPEG / PNG / WebP / whichever is smallest), the quality (automatic, manual or a target size), the resizing method (scale, fit, cover, thumbnail — an image is never enlarged) and the metadata to keep; files you upload never leave your browser. Every result has a before / after comparison (draggable divider, zoom) and a **responsive set** at 480 / 768

/ 1280 / 1920 px with ready-to-copy `<img srcset>` / `<picture>` code. The **"What would the grade be with optimised images?"** card on the dashboard recalculates the same analysis with the new image sizes (the stored analysis is not changed; for a partial analysis the result is a lower bound; the load estimate does not change because it comes from measured download times; an analysis made with an older version cannot be recalculated — run a new analysis); the measured sizes of the images you processed in this tab are also added to the image sheet of the Excel and PDF exports.

When should you use it? On campaign and shop-front pages, to avoid the embarrassment of "the page loads but the images are broken". Monitor a new campaign page in single-page mode, and when a deployment leaves the main banner returning 404, Site Monitor tells you rather than your customer service desk.

10.8 Synthetic Monitoring with k6

For when a single request is not enough — multi-step journeys such as an OIDC sign-in, an API chain or a form login, run end to end with a real k6 script. You start from a template, and the script reads its environment through variables. Secrets never go in the script body: variables marked as secret are stored encrypted and masked in output and logs, and lists and the form never show them as plaintext (for an administrator review, see "Showing a secret value" below). Run outcomes are classified precisely: a failed k6 check means failure, exceeding the time limit means timeout, other errors mean error, and a run that executed no checks at all is reported as such. If a check could not run at all — the concurrency ceiling was full, or k6 is not installed — the result is skipped: nothing is written to history and no alert is raised, because an infrastructure constraint is not an outage. You can trial a script instantly with "Test Run" before saving it. Use a dedicated service account for monitoring rather than a real user.

Showing a secret value. When a saved secret needs reviewing, a global administrator or the administrator who manages the monitor's team can see it for 30 seconds with the eye button on the variable's row in the edit form. The value sits in a read-only box and can be taken with Copy; it hides itself when the time is up, when you switch tabs or windows and when the form closes, and it is never written to the form or the draft. Showing a value doesn't change it: a new value is still typed into the row's own box. Nobody else can see it — team members and team admins, AUDIT, 24/7 operators and team access sharing (edit or delete level included) don't grant it. Every reveal is written to the audit log as "Synthetic monitor secret variable revealed" with the monitor, the team and the variable's name; the value itself never enters any record or log. Each user can reveal at most 10 values per minute and 30 per hour. Only the monitor's CURRENT value is shown; values in older script versions are never decrypted. If a value can't be decrypted (for example, the encryption key changed), the screen says so: enter the value again in the form and save.

k6 is not embedded. Each run executes as a short-lived, sandboxed subprocess on the monitoring server, and its presence and version are verified at start-up and every few minutes thereafter. Outbound traffic respects your corporate network: if a proxy is configured k6 uses it, and your corporate certificate authority bundle is merged with the system roots and handed to k6. The proxy decision is per monitor and has three settings — automatic, always through the proxy, and direct. Note that with the automatic setting, proxy exclusions are matched as suffixes, so an entry for a domain also excludes all of its subdomains.

Every run records more than pass or fail; it stores where the time went, broken down into DNS, TCP, TLS, sending, waiting and receiving, along with the bytes transferred. The "where did it stall?" panel reads that breakdown, so a run hanging in TLS is visibly different from one waiting on a response. A **connection diagnostics** tab probes the same target with and without the proxy, and with and without the corporate certificate authority, to pin down the "Java can reach it but k6 cannot" class of problem. Every saved version of a script is kept, and each run records which version it used, so "it worked yesterday" is an answerable question. If a journey passes but is getting slower,

no outage alert will ever fire — for that silent degradation there is a per-monitor **slow run alert** that opens a separate alert when the total duration crosses a threshold, going through the same confirmation and recovery cycle.

Setting up and testing. The form has four blocks: General, Scenario (source or template → script → environment variables → test), Schedule and alerts, Notifications. When you pick a template, each variable's description appears under its row; the `__ENV` names your script uses are compared with the variables as you type (undefined, unused, or a name that should be secret). On a saved monitor **Run test** uses the saved secret values; the result panel shows the time per step, where the run stopped and the failure class, and a syntax error offers a "Go to line N" button.

Step-by-step results. Every run stores the duration, request count, p95 and checks per k6 group; failed thresholds; the TLS version of HTTPS targets (with days left when the certificate is tracked) and the failure class (DNS, connection refused, TLS trust, timeout, check, threshold …). The detail view has a step trend chart; when errors rise sharply after a new script version, a "this version broke it" band offers to load the previous version into the editor.

Schedule and security. Instead of a plain interval you can use a cron expression, allowed and blocked hours, holidays and skipped dates, exactly as in database query monitoring. Scripts cannot read files on the server: a script using `open()`, `k6/fs`, a local import, `handleSummary` or a system path is not saved and does not run. Remote `import`s from internal addresses are blocked. The server is hardened so that k6 processes cannot read the application's or each other's secrets, and tokens, cookies and authorization headers in the output are masked.

When should you use it? When "does sign-in work?" cannot be answered by one HTTP request. Run your online banking sign-in journey — form, OIDC redirect, token, portfolio call — synthetically every five minutes, and when any link in the chain breaks, the k6 output tells you exactly which check failed.

10.9 Domain Registration Monitoring

Your SSL certificate can be flawless and you can still lose the domain if the registration lapses. The **Domain** tab checks a domain's registration expiry once a day — expiry dates change rarely, so there is no separate frequency setting. Even if you enter a subdomain, it is reduced to the registrable domain. The warning threshold (30 days by default), the critical threshold (7 days) and the reminder days are configurable per monitor.

The registration tab in the detail window is the domain's identity card: registrar and IANA identifier, the important dates, name servers, resolved A and AAAA addresses with their reverse-DNS names, EPP status codes with explanations, and DNSSEC status. The expiry lookup can be traced step by step with a diagnostic tool, and if a corporate SSL-inspecting proxy breaks the lookup, its certificate chain can be captured and added to the trust store (see §14.26).

When should you use it? On every production domain your organisation owns, without exception. Keep the default thresholds for your main domain and add a 90-day reminder for your brand domains — if renewal needs budget approval, ninety days' notice is exactly what that is for.

10.10 Database Query Monitoring

Some problems are invisible from the network: records piling up in a work queue, error rows growing in a log table, a nightly transfer that never started. The **Database query** tab runs a SELECT query you write against a saved database connection (PostgreSQL, Microsoft SQL Server or Oracle) on a schedule and evaluates the result against your rules. A broken rule opens a **threshold alert** (warning or critical), a query that cannot run at all (connection, credentials, query error, timeout) opens a **query failure alert**, and a query slower than the limit you set opens a **slow query alert**. Everything the other types offer is here too: cards, check now, check history, chart, alert history, notes, change history and restore, bulk actions, notification groups, 24/7 and maintenance windows.

Connections. You do not re-enter connection details for every monitor: you save them once for your team in the **Connections** window in the page header (server, port, database / service name or SID, instance name, user name, password and encryption options, depending on the database type). A connection belongs to your team: other teams cannot see it, and neither team access sharing nor the 24/7 team opens it (in the monitor list they see only the connection's name and type); team members who can edit monitors manage it. The password is stored encrypted and is never shown again; it may be left empty (an account without a password). If the server, port, database, user or the connection's team changes, the password is asked for again for safety. The health panel shows the last test, the last use, the last error and the monitors that use the connection. **Use a read-only, least-privileged database account for the connection** (SELECT on the monitored tables only, with no execute, write or schema-change rights).

Query and safety rules. Only a single SELECT (or WITH) that reads is accepted; it is checked when you save, when you test and before every run. INSERT, UPDATE, DELETE, MERGE, schema changes, permission commands, several statements, `SELECT … INTO`, `FOR UPDATE`, locking hints, remote database links, sleep / file-read / command functions and schema- or package-qualified user function calls are rejected. **On Microsoft SQL Server every table must be written with** `WITH (NOLOCK)`, otherwise the query is not saved. The editor checks as you type and tells you what was rejected and why, with the line. The query runs in a read-only session with a timeout (5–60 s) and a row limit; a query that overruns is cancelled. An optional cost pre-check when you save (PostgreSQL and SQL Server plans) warns about or blocks very heavy queries.

Nobody sees the data. This monitor is not a data extraction tool: **Try the query** shows only the status, duration, row count, column names and rule results — never the rows. Result rows appear only at alert time, in the alert mail and the alert detail (at most 50 rows and 20 columns); you can mask sensitive columns (`••••`) and choose which columns go into the mail. Only the monitor's own team and global administrators see the rows in the alert detail; someone who reads the alert through team access sharing or as the 24/7 team sees only the row count. The rows are taken with the masking and "include rows in the mail" settings in force when the mail is sent. **Try the query**, **Check the cost** and **Check now** run a limited number of times per user per hour (60 by default, all three together); a run that did not execute because the database was busy is not counted. Another team that edits through team access sharing cannot change the connection, the query, the rules, the masking or the mail content, cannot test the query and cannot create a monitor in the shared team; it can run the saved query with "Check now". A monitor's name is unique across all teams — alerts are matched by name.

Flexible evaluation. You define up to 10 rules: row count, a column value (first / maximum / minimum / sum / average), a text match and the change since the previous run (percent or absolute). Each rule has two levels: a **warning** and a **critical** threshold. An alert can open when any rule or all rules are broken. Under each rule a plain sentence says what is checked ("WARNING if the row count is above 10, CRITICAL if above 100").

Flexible scheduling. You run the query at an interval (every minute … every 7 days) or with a **cron expression** (for example on weekdays at 09:00, or every 15 minutes during working hours), in Turkey time. **Allowed windows** (run only on these days and hours), **blocked windows** (do not run at these hours — for example the nightly maintenance slot), the **holiday calendar** (Settings → Platform → Holiday calendar) and extra dates decide when the query does not run. The form previews the next 10 runs.

Detailed alert mail. The mail contains the alert's name and purpose ("what this alert is for"), the connection, when the query ran and how long it took, how many rows it returned, the expected and actual value of each rule, the query that ran and (if enabled) the result rows as a table. You can write the subject yourself with placeholders (`{name}`, `{purpose}`, `{rows}`, `{value}`, `{level}`, `{connection}`, `{time}`). Queries and rules you use often can be saved for your team in the **Templates** window and reused with "start from a template".

Getting started faster. Built-in starter templates per database type (errors in the last N minutes, a stuck queue, the age of the newest record, did the daily job finish) open from the Templates window with "Create a monitor from this template". After **Try the query**, tap a column chip to add the matching rule (number → column value, time → freshness) or a mask in one click. If you put a "row count" rule on a query that returns a single row such as `SELECT count(*)`, you are warned (the rule always sees 1) and offered "Convert to a column value rule". The **freshness rule** measures the age of the newest record against the database clock (for example a warning when the last record is older than 15 minutes, critical after one hour); columns without a time zone are read in the zone you choose in the rule (empty = the system setting, Istanbul by default). The **change rule** can compare with the previous run, or the same time yesterday or last week; when the query or the rule changes, the baseline is rebuilt. On a saved monitor, the **backtest** answers "how many alerts would these thresholds have opened in the last 7 / 30 / 90 days?" from the stored measurements, without saving and without sending a query to the database; the chart shows the threshold lines.

Not evaluated. If the query ran but a rule could not be measured (missing column, value not a number …), the card stays grey and shows the first reason and for how many runs it has lasted; after three such runs in a row a "Query failed" alert opens. **Account and connection security:** give the read-only account script in the connection form to your DBA; "Test connection" warns when the account can write, and if the administrator setting blocks such accounts the save is refused. On PostgreSQL `prefer` / `disable` can fall back to an unencrypted connection (new connections default to `require`); on Oracle TCPS can be enabled (port 2484). Database administrators recognise the session and the query by the application name and the leading comment, both carrying the monitor's id. **Mail columns:** on a new monitor only the columns you choose go into the mail; masking is suggested for columns that look sensitive (national ID, IBAN, card, phone …). If the **holiday calendar** is about to run out a notice appears; a global administrator adds next year's fixed-date public holidays in one click and enters the religious holidays by hand. Note: the 24/7 team and people reading through team access sharing see the measured values (list, history); they cannot see the rows, the connection address or the query test.

When should you use it? Whenever you can measure the outcome of a business rule as a number. For example, "warn if more than 20 transactions ended in `ERROR` in the last 15 minutes, critical above 100" can run every 5 minutes during working hours and skip holidays; the alert mail takes the stuck transactions to the team as a table.

Quick setup and smart rules (2026-11). The **Connection examples** section of the connection form shows ready-made scenarios for the selected database type (for example a SQL Server named instance, an Oracle service name / SID / TCPS) with their field values and a copyable connection string; the "What goes in each field" list gives each field's rule and an example. You can fill in a new connection by pasting a connection string (a password is never taken from the string — a string that contains one is cleared from the box at once; you type the password yourself) or copy an existing connection. A connection test now shows the problem step by step — name resolution, network, TLS, login, query, privileges — with what to do for each step (a connection test uses the same hourly test allowance as a query test), and every connection has a 24-hour health card listing the monitors that use it. The **Quick add** wizard sets up a monitor in a few clicks (connection, template or query, test, rule, schedule), and the same query can be created for several connections at once. Ready-made DBA templates (replication lag, blocked sessions, long open transactions, database size, failed jobs) come for all three database types. When the safety check refuses a query, **Fix** offers a previewed correction (NOLOCK, row limit). **Suggest threshold** proposes a threshold from the last 7 days or from a test. Cards show the last 24 hours' value trend, the chart marks alarm periods and changes, and the list can show only monitors "in breach now" or group them by connection; the alert mail tells when the breach started, for how many runs it has lasted and the last 10 values (values derived from a masked column are hidden as ••••). Two new rule kinds exist: **unusual value** (the value leaves the usual band of recent runs, optionally taking daily or weekly seasonality into account) and **frozen value** (the value has not changed for a given number of runs). An unusual value rule keeps the runs that breached it out of its baseline; if

the value moves to a new level for good, the rule accepts it as normal after as many consecutive runs as its window (30 by default) and the alarm closes by itself. If the history holds enough runs but runs with an empty value or breaching runs left too few samples, the rule says "too few samples" and counts as not evaluated — never as healthy. A "Data rules" widget can be added to your personal dashboard.

11. Maintenance Windows

A flood of alerts during planned downtime is noise, and worse, it desensitises people to the real thing. The **Maintenance** tab lets you define windows that silence specific monitors — or all of them — for a given period. Operations staff and team administrators use it.

When you define a window you give it a name and description and pick its targets: individual monitors (HTTP, port, keyword, ping, page, DNS, synthetic, domain and inventory certificate domains can be mixed freely) or simply "all monitors". The schedule is defined in a time zone: a start time, a duration in minutes, and a recurrence — one-off, daily, weekly (choose the days) or monthly (choose the day of the month). The recurrence arithmetic is daylight-saving safe.

While a window is active its effect is absolute: no alert is raised for the target monitors and nothing is sent on any channel — not the first alert, not the daily reminder, not even a DNS change. Existing alerts that recover inside the window close silently, with no resolution email either. Checks made during maintenance are excluded from the uptime percentage, so planned downtime does not penalise your availability figures. The active target set is held in memory and refreshed roughly every 30 seconds, and on every change, so the lookup in the sweep path costs nothing.

When should you use one? If you have a database maintenance slot every Sunday between 02:00 and 04:00, define a weekly window: the relevant monitors stay quiet for that period, and at 04:01 normal alerting resumes exactly where it left off.

---

12. Security Model

Site Monitor is a monitoring tool, but it is also a corporate record system, which is why authentication, session handling and auditing were part of the design from day one. This section gathers all of the security controls in one place.

12.1 Authentication

Authentication is session-based: HTTP sessions are managed by Spring Session and, in the production profile, persisted to the database so that every pod shares them. Local passwords are stored with BCrypt. API requests are guarded by a custom interceptor rather than a full security filter chain.

With directory authentication enabled, sign-in binds to Active Directory, and on the first successful sign-in the user is provisioned automatically along with their organisational role, manager relationship and team. The local bootstrap administrator account always works, as an emergency route in, and the directory and mail settings are reachable only from that account. The bind password is stored encrypted.

"Remember me" gives a persistent seven-day session: a signed token is held in the database and refreshed on every sign-in.

Username prefix. A person can have two accounts in the organisation (for example a staff ID starting with N and a second account starting with MP). On **Settings → Security → Sign-in methods → Username prefix** a global administrator can allow only usernames that start with given prefixes (for example `N`) to sign in; the rule applies to password, LDAP, one-time code and "Remember me" alike, and case doesn't matter. An account that doesn't match is refused after its password is verified, with a message naming the allowed prefixes; a wrong password gets the same generic error for every name. For code sign-in the answer is always the same and no code is sent; an account that doesn't match can't decide through e-mail approval links either. When the rule is turned on, open sessions of non-matching accounts end within seconds with a 10-second notice. Accounts on the exempt list (for example a service account) and the installation admin account can always sign in. Before saving, the **Impact preview** shows how many active users would be kept out and who they are; a value that would lock out your own account isn't saved. While the rule is on, the sign-in page reminds users of the allowed prefix below the username field.

12.2 One Active Session

A user holds at most one live session, and the newest sign-in wins. The interface pings the server every few seconds to keep the session fresh. Sign in from another device and the older session gets a 401 on its next request and is redirected to a "session expired" page. Attempting to sign in while a live session exists returns a conflict; accept the confirmation dialogue and the older session is dropped. An administrator can force-terminate any user's session from **System Health**.

12.3 Progressive Account Lockout

Lockout hardens in stages against brute-force attempts:

Failed attempts	Wait
5 failures	30 seconds
3 further failures	2 minutes
2 further failures	10 minutes
1 further failure	30 minutes
Beyond that	Permanent lock, released by an administrator only

12.4 Inactivity Timeout

After a period of inactivity a 60-second warning countdown appears; when it runs out the session is closed automatically.

12.5 Container Security

```
securityContext:
  runAsNonRoot: true            # never runs as root
  runAsUser: 1000               # UID 1000
  readOnlyRootFilesystem: true  # root filesystem is read-only
  allowPrivilegeEscalation: false
  capabilities:
    drop: [ALL]                 # all Linux capabilities dropped

# only /tmp and /var/log are writable (emptyDir)
```

12.6 The Audit Trail

Every sign-in, sign-out and administrative action is recorded with a UTC timestamp, the user, the client IP, the geographic location, the browser, the event type, the affected resource, the outcome and a field-by-field before-and-after diff. Records are append-only and hash-chained: each row carries its own hash and the hash of the row before it, so tampering with history is detectable rather than silent. Records are archived as line-delimited JSON before the retention job removes them.

Audit entries are enriched with anomaly flags: out-of-hours access, an unusual IP address, an impossible travel velocity, brute-force patterns and rate limiting. The detection windows are managed under **Settings → Login Anomaly**, and an unusual concentration of failed sign-ins can open an incident record automatically.

12.7 Monitor Change History

The audit trail belongs to the security team and is open only to admin and AUDIT roles. But the question a team member asks about their own monitor — "who set this up, when, with what settings, and who changed what afterwards?" — is part of the day job. That is why there is a separate, product-facing layer: `monitor_change_log`.

Every monitor, certificate inventory record, monitor group and maintenance window keeps its create, update, delete and rollback events field by field (old → new) alongside a full snapshot of the state. Sensitive fields go through the **same** blocklist as the audit trail and come out masked as `***`. Anyone making a change can add a short reason for it, and the change also lands in the activity feed as a `CONFIG_CHANGED` event.

Getting to it: the **Changes** tab in each monitor's detail view, scoped to the team — another team's history returns a 404 and raises a security event. Administrators also get a **Monitor Changes** console that pages through every monitor's changes in one list. Rolling back to an earlier moment is supported: nothing is erased, the rollback itself is appended as a `RESTORE` entry, and masked fields and team ownership are deliberately left untouched.

When the feature went live, the monitor events already sitting in the audit trail were carried across once (`AUDIT_BACKFILL`); anything older than the audit trail's own retention window simply isn't there.

12.8 Error Handling and Information Leakage

A global exception handler catches everything that is not handled explicitly and returns a helpful message rather than an internal one:

Condition	HTTP	What the user sees
Resource not found	404	The specific message
Conflicting state	409	The specific message
Invalid argument	400	The specific message
Not permitted	403	The specific message
Duplicate record	409	"This domain is already in the inventory", and similar
Validation failure	400	"Invalid field(s): X, Y", with the field list
Malformed request body	400	"Invalid request format"
Missing parameter	400	"Missing parameter: X"
Anything else	500	"Server error" — the stack trace never reaches the browser

Stack traces and internal error detail go to the log file only.

12.9 Masking Sensitive Fields

Full HTTP request and response tracing is available but switched off by default; you enable it by raising the log level for the request logging filter alone. When it is on, roughly sixty sensitive field names across JSON bodies, form bodies and URL query strings are masked automatically:

```
password / passwd / pwd / pass /
old_password / new_password / smtp_pass / db_password /
token / access_token / refresh_token / bearer / csrf /
secret / api_key / client_secret / private_key /
session_id / jsessionid / sid /
pin / otp / mfa_code / verification_code   (English and Turkish variants)
```

Sensitive HTTP headers such as `Authorization`, `Cookie`, `Set-Cookie` and API key headers are masked too. Health checks, favicons, static assets and common static file extensions are skipped entirely, and body logging is truncated at 2,000 characters.

12.10 Front-End Error Boundaries

The interface is wrapped in two layers of error boundary: the root layer prevents a blank white screen, and the per-tab layer stops a rendering fault in one tab from taking the rest down with it. The user sees a "something went wrong" message and a refresh button; the full error goes to the console.

12.11 Input Validation

Models carry validation annotations and controllers enforce them:

```
@NotBlank @Pattern(...) String domain  // RFC 1123, wildcards permitted
@Min(1) @Max(65535)     Integer port
@Min(1) @Max(4)         Integer tier
```

An invalid body is rejected with a 400 and the list of offending fields, never a stack trace.

12.12 Outbound Request Protection

Every monitor points at a URL or host that a user typed, which makes server-side request forgery a real risk. Before any check runs, the target host is resolved and every resolved address is validated; the connection is then made to those addresses rather than resolving again, which closes the DNS rebinding window. For page integrity checks, each parsed resource and each redirect hop goes through the same gate.

The policy has three tiers. Cloud metadata endpoints, multicast and link-local addresses are always blocked, whatever the configuration. Loopback addresses are blocked unless you explicitly allow them. Private and site-local addresses are allowed by default, because this is an internal tool whose whole job is to watch internal services — but an administrator can switch that off live if the deployment is internet-facing.

The same policy is handed to k6 as an address blocklist, because k6 resolves its own DNS and would otherwise bypass the gate entirely.

12.13 Identifying the Real Client

Behind a reverse proxy, the client address that matters for auditing and anomaly detection comes from a forwarded header rather than the socket. Site Monitor takes an ordered list of candidate headers and an index into the resulting chain. The index is what makes this safe: a positive index counts from the left, which is only correct behind a proxy that sanitises the header, while a negative index counts from the right, selecting the hop your own infrastructure added, which a client cannot forge. A diagnostic endpoint dumps every known forwarding header alongside the socket address so that operations can pick the right setting rather than guess.

12.14 Cross-Origin Requests

Allowed origins are read live on every request, so changing them takes effect without a restart. Two safety rules are built in: a wildcard is stripped from the list, and if the list ends up empty, cross-origin access is disabled rather than opened. Getting the configuration wrong therefore fails closed.

---

13. Roles and Permissions

Access control has three layers, and they compose. This section covers each of them, then shows how they combine.

13.1 System Roles

Role	What it is for
`ADMIN`	Full access; a global administrator additionally sees the permission matrix, audit log and SQL console
`TEAM_ADMIN`	Team administrator, typically the product owner — full control within their own teams
`USER`	Everyday user — reads everything in scope, manages their own team's monitors and alerts
`AUDIT`	System-wide read-only, for auditors; no settings access

13.2 Organisational Roles

Alongside the system role, each user carries an organisational role — product owner, technical owner, manager or C-level. It does not grant access; it drives escalation routing and weekly report approval.

13.3 Team Scope

Users belong to a primary team and may be members of several others. Every inventory entry, monitor, report and alert carries a team, and a user's scope determines which of those records they can see and manage. A blank scope means unrestricted; an empty list means nothing.

13.4 Default Permission Matrix

The defaults below can be edited per role from the **Permissions** screen. Administrators are always fully permitted.

Capability	ADMIN	TEAM_ADMIN	USER	AUDIT
Viewing dashboards and certificates	✓	✓ (in scope)	✓ (own teams)	✓ (all)
Triggering an immediate scan	✓	✗	✗	✗
Managing the certificate inventory	✓	✓ (in scope)	read only	read only
Acknowledging, resending and resolving alerts	✓	✓ (in scope)	✓ (own teams)	✗
Logging 24/7 calls (`noc_calls.write`)	✓ (global only)	✗	✗	✓
Viewing incidents (Alerts → Incidents)	✓ (all)	✓ (own, other teams read only)	✓ (own, other teams read only)	✓ (all)
Commenting on incidents	✓	✓ (in scope)	✓ (own teams)	✗

Capability	ADMIN	TEAM_ADMIN	USER	AUDIT
Managing escalation contacts	✓	✓ (in scope)	read only	read only
Editing alert thresholds	✓	✗	read only	read only
Managing teams and users	✓	✓ (in scope)	read only	read only
Writing weekly reports	✓	✓	✓ (own team)	read only
Approving weekly reports	✓	✓	✗	✗
Configuring monitors	✓	✓ (in scope)	read only	read only
Managing maintenance windows	✓	✓	✗	✗
Viewing the audit log	✓ (global only)	✗	✗	✓
Permission matrix and SQL Playground	✓ (global only)	✗	✗	✗
Directory, mail and general settings	✓ (bootstrap account only)	✗	✗	✗

Destructive operations — purging inventory, terminating sessions, force-releasing the scheduler lock — are marked sensitive and ask for confirmation when you grant them. When a new resource key is added, its defaults are seeded on first start-up and backfilled into existing databases on upgrade, with any administrator customisations preserved.

13.5 How Access Is Actually Decided

Whether a user can see a screen is the intersection of three layers, not a single flag. Following this order is the quickest way to troubleshoot.

```
1. System role         ADMIN · TEAM_ADMIN · USER · AUDIT
        |              sets the role's default permission set
        v
2. Permission matrix   resource key x action (view / edit / execute)
        |              OVERRIDES the role default - set on the Permissions screen
        v
3. Team scope          view scope  +  manage scope
                       "may you do this" and "may you do this to THIS record"
                       are two different questions
```

Scope sits above permission. A user may hold the inventory edit permission and still only be able to edit their own team's records. A blank scope means unrestricted; an empty list means none — do not confuse the two.

The most visible consequence is the difference between a global and a scoped administrator. An administrator account that arrives from the directory is treated as scoped if it is limited to particular teams: fully capable within those teams, but unable to see the **Permissions**, **SQL Playground** and **Audit Log** screens. Those three are open only to a local administrator with unrestricted scope. The settings screen is narrower still — only the bootstrap administrator account reaches it (see §14.2).

To check your own permissions, open your profile from the user menu; to inspect someone else's, the user record under **Admin Panel → User Management** shows their assigned role and team memberships.

---

14. Screens and Actions

This section is a tour of the interface, tab by tab. The tabs are grouped in the sidebar: the Certificate dashboard and the Personal dashboard at the top, then Certificates, Monitoring, Alerts, Reports, Logs and Management. The conceptual detail behind the monitoring tabs lives in 10. Monitor Types; here we focus on what the screens do. We start with the behaviour that is common to every screen — learn it once and it serves you everywhere.

14.1 Behaviour Common to Every Screen

The interface is a single-page application, so switching tabs never reloads the page. Even so, where you are lives in the address bar, because the screens share three capabilities.

Shareable links. Everything you can see on screen is written into the address: the tab, the team and group filters, the search text, the selected statistic card, the sort order, the page number and any open detail window. Copy an address such as `?tab=keyword&group=Payments&q=api&page=2&monitor=42`, send it to a colleague, and they open precisely the view you were looking at. Every monitoring page and every detail window has a **Copy Link** button that puts the address on the clipboard and confirms with a notification. Default values are never written to the address, so an unfiltered view gives you a clean link. Switching tabs clears the previous page's parameters. Older `?monitor=` links from emails continue to work.

Pagination. No list screen ever draws more than two hundred records at once. Every list view — the nine monitoring pages, Status, the certificate cards on the dashboard, the inventory, maintenance windows and the server-side lists — uses the same pagination component. You choose a page size of 25, 50, 100 or 200 (50 by default) and your choice is remembered for that view. The bar underneath shows "Page X of Y · A–B of N records" alongside first, previous, numbered, next and last navigation; past ten pages a box appears so you can jump straight to a page number. Changing a filter or the search text returns you to the first page; the sixty-second auto-refresh never moves you; and a deep link finds its target record whichever page it happens to be on.

Language, theme and identity. Click your name at the foot of the sidebar to open the user menu. From there you can see your last sign-in, change your password (6–64 characters, no leading or trailing space), and switch the language (English or Turkish) and the theme (light or dark); both are remembered in your browser. If you have permission, **Settings** is there too, with **Report a Problem** just below it, available from every screen. **Sign out** ends the session in this browser even without a connection: if the server can't confirm it, a note says so and the server session is closed as soon as the connection is back (at the latest before the next sign-in). Signing out in another tab, or signing in as another user there, is noticed by the open tabs at once (2026-10-22).

Monitoring menu. The monitor types sit in four groups; each group opens and closes on its own in the menu, and you reach the monitors under the group you open. The groups you open are remembered in your browser, the group of the page you are on opens by itself, and a closed group's heading shows the open alarm count of the monitors under it. The groups: **Availability** (HTTP / Website, Ping, Port — is it up?), **Domains and DNS** (DNS, Domain Expiry — is the address right and still valid?), **Content and experience** (Keyword, Page Integrity, Page Speed, Synthetic — is the page correct, complete and quick?) and **Data and business rules** (Database query monitoring — is the result in the database what you expect?).

Each monitoring page carries two built-in help surfaces: a box at the top of the page explaining what that monitor type does and where its data comes from, and a guide button beside the form showing how to fill the fields in, with examples.

14.2 Tab Index and Who Sees What

The table below gives each screen's address-bar key and its visibility rule. Knowing the key is the shortest route to linking someone straight to a screen.

Group	Screen	Address	Who sees it
—	Certificate dashboard	`?tab=dashboard`	Everyone
—	Personal dashboard	`?tab=mydash`	Everyone (widgets follow their own permissions)
Certificates	All Certificates	`?tab=all`	Everyone
Certificates	Domain Inventory	`?tab=domains`	Everyone; editing depends on permission
Certificates	Status	`?tab=uptime`	Everyone
Certificates	Expiry Forecast	`?tab=forecast`	Everyone
Certificates	Renewal Advice	`?tab=renewal`	Everyone
Certificates	Renewal Guide	`?tab=renewal-guide`	Everyone
Monitoring	HTTP / Website	`?tab=http`	Everyone
Monitoring	Domain	`?tab=domain`	Everyone
Monitoring	Port	`?tab=port`	Everyone
Monitoring	DNS	`?tab=dns`	Everyone
Monitoring	Keyword	`?tab=keyword`	Everyone
Monitoring	Ping	`?tab=ping`	Everyone
Monitoring	Page Integrity	`?tab=page`	Everyone
Monitoring	Synthetic Monitoring	`?tab=scripted`	Viewing is open; editing needs its own permission
Alerts	Warnings	`?tab=warnings`	Everyone
Alerts	Incidents	`?tab=incidents`	Everyone — other teams' incidents read only
Alerts	Maintenance	`?tab=maintenance`	Everyone; managing depends on permission
Alerts	Alert History	`?tab=alerthistory`	Everyone
Alerts	24/7 Coverage	`?tab=noc`	Everyone — monitors within your scope; switching on needs permission to edit the monitor
Reports	Statistics	`?tab=stats`	Everyone
Reports	Weak Algorithm Report	`?tab=weakalgo`	Permission-based

Group	Screen	Address	Who sees it
Reports	Weekly Reports	`?tab=weeklyreports`	Permission-based
Reports	Incident and Error History	`?tab=incident-history`	Permission-based
Reports	Technical Error Reports	`?tab=channelreports`	Permission-based (team scope)
Logs	Activity Log	`?tab=activity`	Everyone — own teams only
Logs	My Activity	`?tab=myactivity`	Everyone — own records only
Logs	Audit Log	`?tab=system`	Global administrator or auditor only
Management	Admin Panel	`?tab=admin`	Everyone; sub-tabs depend on permission
Management	System Health	`?tab=health`	Permission-based
Management	Permissions	`?tab=permissions`	Global administrator only
Management	SQL Playground	`?tab=sqlplayground`	Global administrator only
Management	Issue Reports	`?tab=login-issues`	Permission-based
—	Help	`?tab=help`	Everyone
—	Settings	`?tab=settings`	Bootstrap administrator account only

If you cannot find the Settings screen, that is why: it is not in the sidebar. It is reached from the user menu at the foot of the sidebar, and only when you are signed in as the bootstrap administrator defined at installation. The restriction is deliberate — the mail password, the directory connection and the encryption key belong to one account.

14.3 Sign-In

Screen: the application address.

Action	What happens
Username and password	A normal sign-in, local or via the directory
"Remember me"	A persistent seven-day session
Repeated failures	The counter rises and progressive lockout begins
Lockout expires	You may try again
Permanent lock	A message is shown; an administrator must release it
Report a Problem	A locked-out user can leave a report with a screenshot (see §14.23)
Signing in with a session elsewhere	A conflict and a confirmation dialogue; accept and the older session is dropped

14.4 Certificate dashboard

The screen you land on after signing in. An expandable statistics panel — total, valid, warning, error, expiring within 30 days, expired — sits above cards carrying each certificate's domain, days remaining, status badge, issuer and last check.

For you — today. The collapsible panel at the top gathers what needs attention across the teams you can see: certificates with under 30 days left, open alerts, flapping, slowing and silent monitors, domain registrations about to lapse, notifications that could not be delivered, certificate health findings and this week's report. Only cards with something in them are drawn; those at zero are listed by name in the single **All clear** line underneath. The **Muted and under maintenance** card shows where the system is deliberately quiet: maintenance windows in progress or starting within 24 hours, paused monitors (with how long they have been paused, shown in the warning colour once a pause passes a week, as it may have been forgotten) and weak-algorithm exceptions that expire within seven days. The ▲ / ▼ marker beside each card's count shows the change on this time yesterday (a rise in red, a fall in green), and the strip under the panel heading sums up the alerts opened and resolved and the certificates renewed in the last 24 hours. The comparison relies on an hourly snapshot, so the markers do not appear on the first day after installation or after a long outage.

Action	What happens
Click a statistic card	Filters to that category
Status or expiry filter	Narrows by state or days remaining
Search box	Live filter across domain and issuer
Sort and page size	Orders by priority or days remaining
Click a card	Opens the certificate detail window
"Check Now" (if permitted)	Starts an immediate background scan
Language and theme	From the user menu, switches between English and Turkish, light and dark

The **Personal dashboard** (`?tab=mydash`) is a second dashboard built from the widgets you choose; the layout is saved to your account and opens the same on every device. **Edit** lets you add, remove, resize and reorder widgets. Clicking a number, tile or row in a widget opens the related screen already filtered to that number (for example the "Critical" tile shows only critical open alarms, an alarm row opens that alarm). The **24/7 widgets** are for the on-duty team: the **Status light** turns red (critical or high alarms open), amber (only warnings) or green (no open alarms) based on the alarms you can see and says how long the oldest one has been open; **Awaiting a call** lists alarms sent to the 24/7 team that nobody has called about yet and turns red after 15 minutes; **Maintenance windows** and **Open incidents** follow the same colour rule. The **24/7 command layout** in the add-widget dialog places these widgets in one click. In edit mode a widget's **Colour panel** button paints the whole tile in the status colour with a big number in the middle; **TV mode** uses this by default (switch it off with **Colour panels** in the top bar). In TV mode, **Widget density** in the top bar sets how many widgets fit on one screen: **Comfortable** (fewer, bigger widgets that read from a distance), **Compact** (the default; up to 15 colour panels on a 1920 × 1080 screen) and **Dense** (the most widgets). Widgets fill the screen without gaps: on a page with few widgets the cells grow, and a widget stretches into empty cells at the end of its row. A colour panel takes one cell and its text grows and shrinks with the cell. List and grid widgets get the width and height they need to stay readable. The choice is remembered in this browser. Three Grafana-style grids are available too: the **Service status grid** (each service as a tile in its status colour), the **Monitor type heat map** and the **Team × monitor type** matrix (which team has problems in which type, by cell colour); clicking a cell opens the Monitoring Overview filtered to that team and type. The **Colour panels** group in the add-widget dialog holds single-figure widgets (channels missing the period report — amber is a task, not an outage, and a click opens the channel list filtered to "Not started" —, critical alarms, overdue 24/7 calls, oldest critical alarm, unacknowledged alarms, failing monitors, overdue checks, 24-

hour success rate, teams with failures, services in outage, critical incidents and certificate expiries); they are always drawn as colour panels, green at zero and amber or red when there is a problem. The **Colour panel wall** layout places them all at small size in one click. Three **time-series widgets** can be added too (they are not in the default layout; take them from the add-widget dialog): **Alarm trend** shows, as a bar chart, how many of the alarms you can see were opened and closed over time — switch between **24 hours** (hourly) and **7 days** (daily, Istanbul days); the choice is remembered in this browser, and clicking a number opens Alarm History for the same period. **Favourites: response time** lists the monitors you starred with a mini chart of their response time over the last 24 hours and the latest value (failing ones first; a row opens the monitor); an hour without a measurement is a gap in the chart, not a zero. Domain registration monitors measure no response time and are not listed. **7-day availability** is a gauge comparing the measured availability of the monitors you can see over the last 7 days with the SLA target: green on target, amber up to 1 point below it, red when lower and grey without measurements; at medium and wide size it also lists the monitors furthest below the target, and it can be drawn as a colour panel. Members of the 24/7 monitoring team see the whole organisation on their Personal dashboard; the chip under the page title states the scope (**Whole organisation (24/7 team)** or **Your teams**). Data that could not be read, or is out of date, is never shown green.

14.5 Certificate Detail Window

Clicking any certificate card opens a window with five tabs:

- Details: domain, status, days remaining, subject and issuer, validity window, last check, SAN list and any error message.
- Alerts: every alert this certificate has raised, with acknowledgement and resolution information.
- Notifications: everything that has been sent — recipient, subject, email and webhook status, trigger type.
- Security: full distinguished names, serial number, key and signature algorithms, key usage and extended key usage, chain, revocation and deployment status, OCSP and CRL URLs, SHA-256 fingerprint.
- Notes: free-text notes specific to this certificate, which you can add, edit and delete.

14.6 Statistics

Detailed certificate counts, a tier distribution pie chart and a per-team breakdown of valid, warning and error states. Click a tier slice or a team row to filter the **Certificate dashboard** to that slice. Users with a limited scope see only the teams they can reach.

14.7 Warnings

Shows only certificates in a warning or error state; filtering and sorting work exactly as on the **Certificate dashboard**. It is the quick worklist for whatever is broken.

14.8 All Certificates

A table rather than cards: domain, issuer, subject, expiry date, days remaining, status and last check. The domain, issuer, days remaining and last check columns are sortable.

14.9 Renewal Advice

Generates prioritised, plain-language recommendations for each certificate: critical (act now), warning (plan the renewal) and informational (keep an eye on it). It is the weekly agenda for whoever coordinates renewals.

14.10 Renewal Guide

Brings your organisation's resources, CA portals and platform notes for renewing certificates together in one place. Most certificates are bought from a commercial certificate authority (CA), so the resources are the heart of the page; generating a key by hand sits folded away at the bottom. From top to bottom:

- **Resources** (`guide_link`): internal documents and external links as a grid of cards, grouped by category. The search box filters on title, description, address and category; the category chips (each showing how many links it holds) narrow the list to one category. The order is always CA portals, then platforms (NetScaler, WAF, IIS, Kubernetes / OpenShift and so on), then tools. Each card shows the link type (web page, network folder or email), a title that opens in a new tab, the description, and a short address with a copy button — a browser may not open a network folder, so copy the path and open it in File Explorer. If there are no CA portal links yet, a placeholder heads the list, and an administrator can use it to open "Add the first link" with the category already filled in.
- **Buying or renewing through a CA**: six short steps — order or renew in the CA portal, prove you control the domain (DCV: email, a DNS TXT record or an HTTP file), approval and issue, downloading the right format (PEM with the chain, or PFX), installing it on the endpoints, and checking it in Site Monitor. The details sit behind the information button next to each step, and the steps take you to the matching resource category, the platform notes, or All Certificates and Renewal Advice.
- **Installing on your platform** (collapsible): short notes and copyable commands for NetScaler, IIS, Kubernetes / OpenShift and Nginx / Apache, plus a button to that platform's resource category when there is one. Your chosen platform is remembered in your browser.
- **Advanced: generating your own key and CSR** (collapsible, closed to begin with): the manual route you'll rarely need — scope, key and CSR, matching the certificate to the key and building the chain, installing, checking and wrapping up. You can tick steps off as done; the ticks are only saved in this browser, and the heading shows your progress while the section is closed.

The "On this page" row in the header jumps to each section (opening the collapsible ones); it isn't shown on phones. The header also has buttons for Renewal Advice and Domain Inventory, and administrators get **Add Link**. An administrator adds links, edits or deletes them from the card's Actions menu, and orders them by number.

14.11 Expiry Forecast

The analytical view of certificate expiry: headline cards (critical at 7 days or fewer, high at 8–14, warning at 15–30, total active), a daily expiry distribution chart, a calendar heat map, load distribution by team and status, and a list of what is coming up. Click a day in the calendar to see the certificates expiring on it. This is the capacity planning screen — it answers "how many renewals are stacking up in November?" at a glance.

14.12 Domain Inventory

The register of domains to be monitored. The table shows domain and port, tier badge, team, owner, description, active state and the available actions — edit, transfer and delete. A global administrator manages everything; a team administrator manages the teams they lead; managers and read-only roles can look but not touch.

Adding a domain means filling in a five-part form:

- Basics: the fully qualified domain name, the port (443 by default), the owning team, the tier, the owner and whether it is active.
- Operational flags: external vendor, action required, OpenShift, SSL pinning, internal certificate, JKS keystore, server update, load balancer, WAF enabled, in use, EV certificate, check through the proxy. Apart from the proxy flag these do not change the check pipeline; they are operational metadata that shows up in reports and filters.
- Process information: who purchased it, and for which business unit.

- Descriptions: a general description and a process note.
- Advanced: the expected SHA-256 fingerprint and the expected subject, used for deployment compliance checking.

Deletion is permanent and cannot be undone: the confirmation names the records and what goes with them, and the card leaves the list as soon as you confirm. Transfer moves a certificate to another team. Rename a domain and its entire history moves atomically with it (see §3.9).

14.13 Weak Algorithm Report

Lists certificates using insecure algorithms such as SHA-1 signatures or 1024-bit RSA keys: domain, signature and key algorithm, key size, weakness type, criticality, owner, team and expiry date. It is the first screen the security team opens during a compliance sweep.

14.14 The Monitoring Tabs

Status, **HTTP / Website**, **Port**, **DNS**, **Keyword**, **Ping**, **Page Integrity**, **Synthetic Monitoring** and **Domain** all follow the same layout, so learning one teaches you all of them.

The top of the page carries an explanation box for that monitor type and a statistics strip — total, healthy, failing, paused — where clicking a card filters the list to that state. Below it sits a paginated monitor list you can narrow by status, group, team and free text. Top right you will find **+ New Monitor** and a **Guide** button for that type.

In HTTP / Website, Port, Ping, DNS, Keyword, Page Integrity, Page Speed and Synthetic monitoring, each monitor card shows the last 24 hours' response-time trend and the last five checks, with a 30-day availability line at the bottom (for example `30 d: 99.95% · target 99.9% ✓`). The **1 day · 7 days · 15 days · 30 days** labels on the right of that line tell you whether anything failed in each period: a clean period is green, a period with failures carries a ⚠ icon in amber, and one whose availability fell below the target carries a ⚠ icon in red; a period with no checks at all is greyed out. Hover over a label to see that period's number of checks, failures and availability, followed by every hourly slot in which something failed and how many failures it saw (for example `23/09 17:00–18:00 — 5 failures`); the six most recent slots are listed and any others are counted underneath. On a Port card the monitored endpoint sits just under the host name: the `:port` in large type, a protocol badge coloured by check type (TCP, TLS, HTTP, Banner, UDP), the path being checked for the HTTP type and, for well-known ports, the service name (for example 5432 → PostgreSQL). A Ping card shows, in the same place, a coloured **ICMP** badge (**ICMPv6** for IPv6), the IP version if one was chosen (IPv4 or IPv6) and the number of packets sent per check.

Port monitoring through the proxy. The **Corporate proxy** field on the Port form is **Direct** by default, so existing monitors keep their route. Choose **Always via proxy** or **Same as inventory** and TCP, TLS, HTTP and Banner checks run through the corporate proxy `CONNECT` tunnel; the result then shows the target is reachable *from the proxy network*, and the response time includes the proxy hop. Proxies only open tunnels to the ports they allow, so the form always lists the **ports that can be checked through the proxy** (443 and 8443 by default; see Settings → Monitoring → *Ports the proxy allows CONNECT to*). With the proxy selected, the form warns you if the port is not on that list or if the type is **UDP**: UDP cannot go through an HTTP proxy and always runs directly. If the proxy refuses a tunnel, the check fails with **"proxy refused the tunnel"** (with the allowed ports in the message) rather than reporting the port as closed.

Clicking a monitor opens a tabbed detail window:

- **Check history** — paginated, with the outcome, duration and any error message on each row.
- **Alert history** — the alerts this monitor has raised, with acknowledgement and resolution details.

- **Response chart** — preset ranges of 24 hours, 7 days, 30 days and 90 days plus a custom range; the average, the minimum–maximum band and the 95th percentile are drawn together, with outage periods shaded red. On a ping chart, packet loss appears on a second axis. The default range is 24 hours.
- **Notes** — a free-text notebook for that monitor.

The detail window also offers **Check Now** (if you are permitted), **Copy Link**, edit, duplicate, and pause or delete. To silence a monitor temporarily without deleting it, turn off its "Active" switch.

For the behaviour behind each type, see 10. Monitor Types.

14.15 Incidents

The worklist of outage events derived from monitoring alerts. Each row shows the start time, status, severity and root-cause class; you can filter, comment and close resolved events. "How long did it last and when did it close?" is answered here.

The **My teams' incidents · Other teams' incidents · All** filter at the top (with counts) also shows incidents raised for other teams; the default view is your own teams only. Another team's incident is **read only**: an "Another team's record — read only" badge and the owning team are shown and you can read its comments, but acknowledging, resolving, commenting and deleting are left to that team (the server refuses them as well). Notification recipients, delivery logs and 24/7 call logs stay with the owning team. A global administrator can switch this visibility off with `site.monitor.incidents.visible-to-all` under **Settings → General** (on by default); global administrators and AUDIT users already see every incident, so the filter isn't shown to them. When you switch filters the results stay where they are; if the response is slow the list dims and the new results replace it once they arrive.

14.16 Maintenance

Where you manage the windows that suppress alerting during planned downtime; the mechanism itself is described in 11. Maintenance Windows. The screen lists defined windows with their name, target count, time zone, start, duration, recurrence and whether they are currently active. You create, edit, temporarily deactivate or delete them. Team administrators manage their own teams' windows; a global administrator sees them all.

Upcoming windows are gathered at the top of the list, so "which monitors go quiet tonight?" takes one glance.

14.17 Alert History

The archive of every alert and the place you act on them. All twenty-eight alert types the product raises are recognised here and shown with a readable label.

The filter bar at the top searches on the server, so it stays fast across hundreds of thousands of records: free-text search, alert level, alert type, team, ownership (acknowledged or not) and an open-alerts-only switch. A statistics strip immediately below shows the distribution of the selected set. Copy the link to share the filtered view.

You can collapse records into groups by subject, which folds dozens of alerts from the same cause into a single row. Grouping and the statistics strip are off by default, keeping the plain list view. Each row carries badges showing **how long** the alert has been open and how many times it has **recurred**. An **Export CSV** button downloads the filtered set as a table.

Action	What it does
Acknowledge	Marks it as seen; daily reminders stop, the alert stays open
Resend	A manually triggered notification to every escalation contact, with no quota applied. You can review the recipient list and remove individuals before sending

Action	What it does
Mark resolved	Closes the alert, records who resolved it and sends a resolution notice

> **Acknowledging and resolving now require a reason.** Both actions ask you for a short explanation, and it is mandatory. The reasoning is simple: six months later, whoever reads the alert history is not asking who closed it, they are asking **why**. The note is stored on the alert and shown when the row is expanded.

Expanding a row reveals the notification history — recipient, subject, email and webhook status, trigger type — along with the acknowledgement and resolution details and their notes.

14.18 Weekly Reports

Where teams write their weekly operations report and the product owner approves it. You pick the week and fill in the incident summary (counts of urgent and high-severity events), the list of open problems and the planned work; a status badge shows draft, submitted, approved or returned.

The flow: submit the report for approval, and the product owner receives an HTML email with an approval link. They can approve or return it from the screen or straight from the email — the token link deliberately works without signing in. On Friday morning a reminder goes out for anything still pending, and a report can be handed to another team (global administrators only). Everyday users and team-scoped administrators (managers) open and write their own team's report only — a request to open one for another team is refused with the reason under the team step; product owners see and approve the teams they lead; a global administrator sees everything and can open a report for any team. After an approval or a resend the screen tells the real mail result (sent / queued, will retry / mail switched off / recipients inactive / could not be sent). The approval link's token is hidden in the mail history.

14.19 Incident and Error History

The SRE incident ledger, written by hand rather than derived from monitoring. Each record carries the title, when it happened, when it was detected and resolved, severity, status, category, error and channel codes, the affected service and application, a root-cause summary, the resolution steps, the business impact and whether the service level agreement was breached. Screenshots can be attached. Summary tiles at the top of the screen break the set down by status and by whether the SLA was met.

14.20 Activity Log

Lists every check of every monitor type, manual "Check now" runs (with who ran them), monitor create, change, pause and delete events, alert opened / escalated / acknowledged / resolved events and 24/7 notifications in one feed. It can be filtered by type, status (timeouts included), event group (check, alert, notification, change), team, monitor, person, failure reason and a custom date range, and the whole filtered result can be exported to CSV or Excel. Clicking a row opens the activity’s own page (with a shareable link): the full check result and failure explanation, a comparison with the previous and next check, a ±24-hour response time chart, the alert this check led to and who was notified, field-by-field before and after values for a change, links to the monitor, its check history, changes and the alert, and end-to-end diagnosis. For a failed check, the "What else happened at the same time?" panel shows other monitors that failed in the same minute and a likely common cause (for example the corporate DNS). "This monitor’s timeline" shows a monitor’s availability strip, outage periods and mean time to recover; an HTTP or Keyword check that got an unexpected HTTP status and a failed synthetic scenario count as an outage there, and the activity page shows them as "Check failed". The "What else happened at the same time?" panel does not count the record you are looking at: its number is the failed checks other than this one. Sections

hidden from you because of your permissions or the monitor's current team say that you are not allowed to see them; a section that could not be read right now says so and can be retried. Without a date range an export contains the last 30 days; a custom range is at most 90 days. Everyone sees only their own teams' records.

14.21 My Activity

Your own record: the actions you have taken and the sign-ins recorded against your account. It exists so that everyone can answer "what did I change and when?" without needing audit access. The same page holds your push preferences (snooze, level, monitor types, push language, self test) and your **My push notifications** history — see §9.6.

14.22 Audit Log

The security and compliance trail, open to global administrators and auditors only. It shows the timestamp, the actor, the client address with its geographic location, the event type, the affected resource, the outcome and the before-and-after diff, alongside any anomaly flags. Records are append-only and hash-chained.

14.23 Issue Reports

Where reports submitted through **Report a Problem** land, including those left by users who could not sign in. Each report carries the description, screenshots, the browser and the client address. Reports can be acknowledged and resolved, and a daily digest can be emailed.

Error messages and request id (8 October 2026). Every error in the application says what happened, the likely cause and what to do next; network loss, timeouts and missing permissions are each explained on their own. The **Technical details** section under an error shows the HTTP status, the error code and the **request id**; copy that id into your report and the administrators can find the entry in the server log at once. Going to an address that does not exist opens Site Monitor's own 404 page, with links back to the home page and the most used pages.

14.24 Admin Panel

The everyday administration screen, divided into sub-tabs:

- Alert thresholds — the day boundaries for warning, high and critical, and the reminder interval (administrators only).
- Escalation contacts — who receives alerts for which team, from which level, with an optional webhook.
- Team management — teams, their leaders, their email addresses and their reporting switches. A team that still has domains, monitors, people, notification groups, technical error report channels / templates or live or upcoming maintenance windows can't be deleted: the delete dialog lists them and **Move** takes them all (channels with their reports and history) to another team; the team's executive summary settings and send history are deleted with the team (2026-10-22). To remove a leader, pick "— Select Leader —" in the edit form and save.
- User management — accounts, roles, team memberships, password resets and lock releases.

14.25 Permissions

The permission matrix: resource keys down the side, actions across the top, roles as the editable dimension. Sensitive actions ask for confirmation when granted. Open to global administrators only.

14.26 Settings

The application-wide configuration screen, reachable only by the bootstrap administrator account, from the user menu. Its sections:

- General — the application base address, the system administrator email, allowed cross-origin sources, and the problem-reporting switches.
- Branding — the application name, tab title, sign-in screen text, primary colour, logo and the announcement banner.
- Monitor groups — the group labels used to cluster monitors.
- SMTP — mail server settings, with a test message button.
- Weekly availability — the Monday email, its history, a preview and the outage PDF.
- Certificate inventory report — the scheduled monthly inventory report and its recipients.
- Storm — alert storm thresholds and behaviour.
- 24/7 Monitoring Team — NOC groups (multiple e-mail addresses, active/default, test e-mail), per-type switches, minimum level, the resolved e-mail and call instructions; a scoped administrator sees it read-only, with the addresses hidden.
- Login anomaly — failed sign-in detection rules and recipients.
- Directory — the LDAP connection, a test bind and an attribute viewer.
- Domain diagnostics — a step-by-step trace of a registration lookup, and the tool that captures a proxy certificate chain as paste-ready text.
- Retention — the retention period for each table, a dry run, the run history and the legal hold switch.
- Database — schema information, table sizes and a schema diagram.
- Secrets — the state of the encryption key and the tools that depend on it.
- Grafana dashboard — the Prometheus metrics exporter (on/off, per-monitor series, record cap, interval), the settings of the importable Grafana dashboard and **Download JSON**; a scoped administrator sees it read-only.

14.27 System Health

The operational dashboard for the platform itself: heartbeat history, mail delivery statistics, database metrics, scan staleness and the scheduler lock. It also carries the database analytics — the busiest and slowest queries, table sizes and connection counts — and the user and session view with sign-in trends, top users and sources, an anomaly breakdown and a weekly activity heat map. Administrators can force-release a stuck scheduler lock and terminate another user's session from here.

Metrics (the "Open metrics" card at the top of the page): Site Monitor's own measurements, per pod. Every pod writes one sample per minute and samples are kept for 7 days (Settings → General, "System metrics retention"). At the top a summary of the current values (live pods, highest CPU and memory, database pool, task queue, last hour's HTTP requests and ERROR log lines), below it the pod list (live; silent = a pod that went quiet without a shutdown marker, a warning; stopped = a pod that shut down cleanly in a rollout or scale-down, not a warning; last sample, uptime; live pods come first, among pods in the same state the most recently started one is on top and stopped pods are last — the pod picker follows the same order) and the charts: CPU, heap, threads, GC pause; requests per minute, error rate, response time; database connections and waiting requests; task pool, queue and overflow; log lines and cache hit rate. The range is 1 hour / 6 hours / 24 hours / 7 days and the pod picker shows a single pod; the choice is written to the address bar so you can share the link. A value that cannot be read shows as "—" and never counts as green; a slice with no sample from a pod stays a gap in the chart.

14.28 SQL Playground

A read-mostly SQL console for global administrators: the table list, columns and relationships, sample queries and a query history. Every execution is audited.

14.29 Help

The screen you are reading. It renders this guide with a table of contents, scroll tracking and a **Download PDF** button. Its language follows the application language, and the PDF you download matches it.

14.30 Product Tour

A user signing in for the **first time** sees a welcome card shortly after the data loads: "Welcome to Site Monitor — a two-minute tour?". There are three choices:

- **Start the tour** — a 17–20 stop walk-through (depending on your role) that spotlights the main places from the left-hand menu to the help button in the bottom-right corner.
- **Not now** — the card closes; it asks again on at most three further sign-ins, then stays quiet.
- **Don't show again** — permanent and kept **on the server**: the card never comes back, even from another browser or computer.

During the tour the screen is dimmed and only the item being explained stays lit and clickable. The balloon carries a title, a short explanation, progress (e.g. 7/20), **Back / Next**, "Read more" (opens that topic's guide section in the side panel), "Skip the tour" and "Don't show again". Keyboard: → next, ← back, **Esc** closes. Some stops ask you to do something ("click the card", "press Ctrl K"); the tour moves on when you do, or **Do it for me** does it on your behalf.

Content by role: everyone sees the dashboard counters, filters, "Check Now", the certificate card and detail window, All Certificates, Monitoring, Alerts, Reports, the command palette, notifications, the user menu (including theme and language) and help. Team admins also see the add-domain stop; admins see Admin and System Health; the auditor (AUDIT) role sees the Audit Log stop. On a narrow screen (phone) a shortened version opens as a bottom sheet.

Page tours: some pages carry their own short tour (All Certificates: filters, status menu, columns, presets, CSV, row selection, row menu; HTTP monitoring: how it works, new monitor, how to fill in, cards). The first time you land on such a page a chip appears in the bottom-right corner: "Want a quick look around this page?". Close it and it will not return for that page.

Getting-started list: at the top of the dashboard a small six-item list guides a new user (finish the tour, open a card, browse All Certificates, look at a monitoring page, see the weekly reports, open the help guide). Items tick themselves off as you visit the pages; the list disappears once complete or when you hide it with ×.

Finding the tour again: user menu → **Product tour**; the "?" help drawer in the bottom-right corner offers **Product tour** and, where one exists, **Tour this page**; the button on the Help page; the command palette (Ctrl K) command "Start the product tour". Even after "Don't show again" you can open the tour this way whenever you like.

What's-new tour: when a release adds new stops, users who already finished the tour see a short "What's new" card at sign-in covering only the new stops; it, too, can be closed with "Not now" or "Don't show again".

For administrators: the KPI under System Health → Users shows how many users completed, dismissed or never saw the tour. **Reset the tour** in the user edit window clears a person's tour state so they see the welcome card at their next sign-in. Completion, dismissal and reset are written to the audit log (`TOUR_COMPLETED`, `TOUR_DISMISSED`, `USER_TOUR_RESET`).

14.31 24/7 Coverage

If something breaks overnight your team may well be asleep, and the 24/7 monitoring team only hears about monitors that are set to notify it (see §9.5). This screen (`?tab=noc`) shows which monitors within your scope **don't** reach the 24/7 team, and why:

Part	What it shows
Summary	Total / covered / not covered / paused tiles (click to filter), the coverage percentage, and coverage bars per type
Reasons	Monitor not opted in · Type disabled by admin · No active 24/7 group · Paused
Filters	Search, team, type and reason; shareable address parameters with the `n_` prefix
Actions	**Notify the 24/7 team** in one click on monitors you can edit; bulk selection with "Notify the 24/7 team (N)"; switching it off from the "…" menu on an opted-in monitor
Call list	An ordered list of people per team — the team manager, a team administrator or an administrator edits it (move up/down, add/remove). Anyone with no phone number in Active Directory is flagged; if the list is empty, the e-mail shows the team manager instead

If there is no active group, an administrator sees a link to Settings and everyone else sees a note to ask their administrator. The dashboard strip "N monitors aren't set to alert the 24/7 monitoring team if they go down overnight" leads here and can be hidden for the session.

14.32 Channel Technical Error Reports

For every channel a team is responsible for (Mobile, Retail Internet Banking, Corporate Internet, POS, ATM …), the previous month's technical error report is prepared on this screen (`?tab=channelreports`) and sent as a PDF to the **team's e-mail address**; the team forwards it to senior management. The team enters the counts; **Site Monitor calculates the rates from them** — the technical error rate, the share of unmapped and quota errors in technical errors, the change compared with the previous month. The SLA rate, notes and images come from the team; Site Monitor formats, lays out and delivers everything.

Item	Content
Channels	A team can have several channels. Each row or card shows the previous month's report status (Not started / Draft / Sent / Changed after sending) and the result of the last sending attempt. The list (2026-10-17): the period summary cards at the top act as **filters** when clicked (sent / draft / not started / inactive), the search over channel, team and description ignores Turkish case and accents ("internet" finds İnternet Şubesi), team and sort (name / period status — missing first / team / **Order**) can be chosen; with "Order" selected, users who can edit a channel change its position within its own team from the row menu (**Move up / Move down**; moving is off while a search or status filter is active); clicking the team badge shows the team's members; a table on wide screens (row actions in the "Channel actions" menu), cards on phones and tablets; more than 50 channels are paged (25/50/100/200). Filters and page travel in the address (`te_q` , `te_st` , `te_sort` , `te_page`): the link can be shared and the list is unchanged when you come back from a channel. The report list on the channel page also has a period / title search, status and year filters and paging (pages of 25, headed by year); leaving the channel clears these filters from the address. In the "New channel" dialog the template source (Turkish default / English default / copy of another channel) is picked with described choice cards. **Access sharing** (Admin → Organisation → Access sharing) opens this module too: a VIEW share shows the team's channels, reports, PDF and history (template read-only); an EDIT share also lets you write report content (open a report, counts, explanations, images, apply the latest template). Creating / editing a channel, the template, executive recipients, approval requests, sending and deleting stay with the team's own members; rows seen through a share carry a "Shared access" badge. People data is never shown through a share: executive addresses, send recipients and approver names arrive as counts only. **Preview e-mail** (report screen, next to Download PDF): the subject, recipients (team, or executives with the team in Cc), attachment and body of the mail to be sent are produced exactly as on sending and shown in a dialog at desktop / phone width; nothing is sent. Without recipients the dialog says why the mail cannot go; a user who may send continues from the dialog with "Send" into the usual confirmation. The mail band and the PDF cover state the report's provenance: **Created by** (name · date), **Last edited by** when different, on approval channels **Approved by** (name · date) or the approval state (awaiting / rejected / content changed after approval), then the generation time; the same rows appear in the preview dialog and in the report header ("Created"). **Send me a test** in the preview delivers the mail (with a [TEST] subject prefix and a "this is a test send" note) to your own address only — nothing goes to the team or the executives and the report does not count as sent (at most 3 per minute). The **recipient summary** under the report title shows the team address count, on approval channels the executive recipient count and the approval state; a mail's To / Cc list is capped at 20 addresses and the preview says so when there are more, the send history records it. The link in the approval e-mail requires the same permissions as in-app approval (approve + read permission, module enabled for the team); after a re-sent approval request the old link says "a newer request exists"
Template	**Per channel**: "open channel X's template" opens X's, "open channel Y's template" opens Y's. Sections: figures (number, percentage, yes/no, short/long text), anomaly topics, text and image slots — charts or screenshots (half = one column, full = two columns). `{channel}` , `{month}` , `{year}` in titles fill in with the report's channel and period. A field can be tied to a yes/no question ("Don't ask this field if this question is No"): if the question is answered "No", the field is exempt from that report — it isn't asked and isn't in the PDF or the e-mail. In the default template, if "Was there an outage in the period?" is "No", the error rate excluding outage days and the outage-caused error count and share aren't asked; if it's blank or "Yes", they are

Item	Content
Report	Opens only for a month that has ended; the template as it is at that moment is copied into the report. Each figure shows last month's value and a change hint. An anomaly title is built from the subject ("Card limit issue") and can be changed by hand. Number fields (figures, topic counts, table number cells) also take the reporting tool's abbreviations: **7.42G** (billion), **130.1M** (million), **681.6k** (thousand), as well as "thousand", "million", "bn", "billion" and "T" (trillion). What you typed stays in the field and the number it was read as is shown underneath ("= 7,420,000,000"). A number typed with an abbreviation keeps it in the report too — the PDF, the e-mail, the summary sentence and the coloured tiles show "4.4G" (the letters are k / M / G / T in both languages, the decimal separator follows the report language, and there is never a thousands separator before the letter: "4400M", not "4,400M", so a value copied from the PDF can be typed back as it is); when the report is opened again the field still reads "4.4G" with the full number underneath. A number typed in full (4400000000) stays in full, and so does an abbreviation that would need more than six decimals (4.123456789G is shown as 4,123,456,789). Calculations, the Excel / CSV export and the cross-channel analysis always use the full number. When a count is **0**, a green round tick appears next to it ("zero — no issues"; on screen, in the PDF and in the e-mail) — an empty field is not zero, and percentages, fields marked "higher is better", figures that only serve as the base of a rate (such as total transactions — zero transactions means no data, not "no issues") and anomaly-topic counts get no tick. "B" on its own is refused (it means thousand in Turkish and billion in English): write k for thousands, G or bn for billions. Percentage fields take no abbreviations
Sections and autosave	On the report and template screens sections start **collapsed**; click a title to open it. The sections you open are remembered for that report or template in this browser (cleared when you sign out). "Expand all / Collapse all" opens or closes them all; find in page (Ctrl+F) also finds text in a collapsed section and opens it. A section with an invalid field opens by itself; if a section you collapsed has fields to fix, their number is shown under its title. While there are changes, the report is saved **every 30 seconds** and when you leave the tab; the status bar says so ("saved automatically at 10:32") and no notification pops up. An invalid field doesn't stop the automatic save: the other fields are saved and the invalid one keeps its old saved value. If someone else changed the report while you were editing, automatic saving stops and a warning appears. While you keep typing, the automatic save never changes the text in the field (a trailing space or a new bullet stays); a half-typed number ("7.42mi") doesn't count as saved until it's complete. If the connection drops, saving is retried at growing intervals. If someone else changed the report, or an older draft was restored, automatic saving stops and you decide with Save. "Discard changes" only undoes the edits made since the last automatic save. In the change history, the same person's automatic saves within 15 minutes of their first one appear as one "Automatic save" row (with each field's first old and last new value); if everything typed was undone, the row says so. The template is not saved automatically
Automatic rates	The default template has the entered counts on top (total transactions, technical errors, unmapped errors, quota errors, outage-caused errors) and a "Rates (automatic)" section below. Rates are calculated as you type and saved: technical error rate = technical errors ÷ total transactions; rate excluding outage days = (technical errors − outage-caused errors) ÷ total transactions; the share of unmapped, quota and outage-caused errors = count ÷ technical errors; the change and the increase compared with the previous month use last month's report's total transactions. The result is rounded to 2 decimal places; a rate above zero but below 0.01% keeps two significant digits (0.0028%) — it never shows 0% while there are errors. The quota and unmapped error counts also show their own rate underneath. With an empty input or a zero divisor the rate stays empty and the reason is shown under the field; without a report for last month the change and the increase are entered by hand. In the template an "Automatic calculation" can be added to a percentage or yes/no field (a ratio: part, optional subtracted value, base; or the change / increase compared with the previous month). Existing channels' templates are updated automatically during the upgrade (shown as a system change in the version history); opened reports keep their own copy, a draft takes it with "Apply the latest template". When at least one rate was calculated in the report, the PDF and e-mail note says the rates were calculated from the counts

Item	Content
Executive summary	Opens the report and the e-mail. The template's sentence patterns are filled with the entered figures (e.g. "Based on September 2026 figures, the Mobile channel's technical error rate was **0.42%**."); figures are printed bold. A sentence that relies on a figure that is empty or exempt (answered "No") is left out — the report screen lists which sentence is waiting for which figure. "Edit the text" turns the automatic text into editable text; "Back to automatic text" undoes it. In the template each line is one sentence; "Insert field" puts a figure into it, and a yes/no question takes two phrasings ("increase" / "decrease"). **Unmapped and quota errors** (count and explanation) are entered in the "… Channel — … Figures" section, right under the technical error count; there is no separate block in the summary card (user decision 2026-10-17 — the previous release kept them inside the card; existing channels' templates are updated automatically on the release, opened reports keep their copy and take it in the draft with "Apply the latest template"; entered values survive under the same field ids). The summary sentences and the colour tiles still tell these counts; the explanation is printed in the Figures section of the PDF and the e-mail under the field's name. A team may still move any figures section into the summary card in the template with "Where to show: Inside the executive summary card": then the section's fields are entered under the summary text, its explanation is printed in the PDF and the e-mail right under the summary sentence about that error, headed by the field's name (at the end of the summary if that sentence was left out), and a figure that was entered but whose sentence is left out (because another figure is missing) is not lost — it is printed in the summary on its own line, e.g. "Unmapped errors: 1,250"; a hand-written summary gets only the explanations, you write the figures into the text yourself
SLA target and colour tiles	A percentage field in the template may carry a **target** (in the default "SLA rate of critical functions" 99.95%, higher is better); "Is the SLA above the target?" is no longer asked — the rate is compared with the target automatically (equal to the target = met). A report may set a different target for its month ("This month's target"); it applies only to that report and shows in the change history. Up to 6 figures chosen in the template open the executive summary as **colour tiles** (default: technical error rate, total transactions, technical errors, unmapped and quota errors, SLA rate): a field with a target is green / red by whether it was met, a field without one by whether it improved on the previous month (by its "better" direction; a percentage defaults to lower is better), a count with no direction is blue with only the arrow and the change ("▲ +1,250 (+3.2%)"); a field with no value is grey "—" (never hidden). The tiles are the same in the PDF, in the e-mail and on screen. In summary sentences `{d:field}` writes the change vs the previous month (count change + percentage, rates in points: "−0.05 pts"), `{t:field}` the target and `{dt:field}` the distance to it; a sentence is left out when last month's report or the target is missing. The template editor has "Target (%)" and "Better" under a field, a "Colour tiles" list in the summary section and an "Insert comparison" menu. The upgrade adds the target, the automatic comparison, the tiles and the new sentences to existing channels wherever the default is still in place
No repeated figures (PDF and e-mail)	A figure is written in only one place in the PDF and the e-mail: a number, percentage or yes/no field whose value the executive summary already shows (drawn in a colour tile or written by a sentence that made it into the summary) is not printed again in the "… Channel — … Figures" and "… Rates (automatic)" sections. A section whose values are all written in the summary isn't printed at all in the PDF and the e-mail (no title, no contents line, no bookmark); its filled notes and short texts move right after the summary text, under the field's name — a note is never printed twice, and a blank note isn't printed. In the default template the outage answer is a summary sentence too ("There was an outage in the period." / "There was no outage in the period.", right before the outage-caused errors sentence); that is why a default report with every count entered shows neither the "… Figures" nor the "Rates (automatic)" section, and the unmapped and quota notes come at the end of the summary (user decision 2026-10-18). A section with a value the summary doesn't write (e.g. the SLA sentence was dropped because no SLA rate was entered) stays in place, with just that value and its own notes. A figure in a tile may also appear in a summary sentence (deliberate). A zero count written only in a sentence gets no green tick (ticks are on tiles and value boxes). Existing channels and team library entries get the outage sentence automatically during the upgrade — only when their summary sentences were never changed from the default (version history shows the system as the author); opened reports keep their own copy and take it with "Apply latest template" in a draft. A value whose sentence was dropped (e.g. another figure is missing, or it is exempt because of a "No" answer) stays in its tile in the figures section, it never disappears. If the summary text was edited by hand, only the values in the tiles are left out (what the hand-written text says can't be known). The report screen, the template editor, the CSV / Excel export, the analysis and the change history are unchanged: the fields are filled in where they always were. The template preview PDF ("Sample PDF") follows the same rule

Item	Content
Errors with an abnormal increase	In the default template the anomaly section is called "Errors With an Abnormal Increase"; each topic's title follows the pattern "{topic}: Error Increase" (e.g. "Card Limit Inquiry: Error Increase"). Since 2026-10-18 every topic is a card that asks: **when** (a day of the report's month, picked from the calendar, plus a start and an end time; tick "Ended the next day" for a range past midnight, at most 24 hours), **the technical errors caused by this topic** and their **share of all technical errors** (divided by "Technical errors in the month", calculated automatically; with the total missing, 0 or smaller than the topic's count no share is printed and the reason shows under the field), **caused by an outage?** (with Yes the **Outage ID** is required), **was there customer impact?** (with Yes the number of affected customers; with No no count is asked and the report says "No customer impact." — if the template is set to "Leave the topic out", a topic without customer impact isn't printed in the PDF or the e-mail at all), the "What happened? (when, where, impact)" description and up to **two optional images** (with captions, full width under the topic; if the topic isn't saved yet the report is saved first when you upload; removing the topic deletes its images). The chips at the top of the card summarise the answers; "Text in the report" at the bottom is the opening text the PDF and the e-mail print for the topic — e.g. "On 12 September 2026, 14:00–15:30, 1,250 technical errors occurred; this is 3.4% of all technical errors in the period. It was caused by an outage (Outage ID: INC-2026-0915). Customer impact: 320 customers." Unanswered information is left out of the text. Which questions are asked, their names and the field the share is based on are set in the template editor's "Anomaly fields" panel. Existing channels get these questions automatically during the upgrade — only where the anomaly section's names were never changed; names and settings a team wrote itself are kept. Opened reports keep their own copy; a draft takes it with "Apply the latest template" (topics already entered are kept; a topic with a customer count counts as "customer impact"). If "Was there an outage in the period?" is answered No while a topic is marked as caused by an outage, the report screen shows a warning next to that question and in the executive summary card — correct the answer or the topic; saving isn't blocked and the report prints both as entered (answering Yes with topics that had no outage is not a contradiction)
Opening and closing topics	Every topic in the anomaly section opens and closes on its own (accordion). When the report opens, existing topics are closed; a closed topic's heading row shows the topic's name and its summary chips (time, count and share, outage and ID, customer impact), and clicking anywhere on that row — or Enter / Space on the keyboard — opens it. A newly added topic opens and the cursor moves to its Topic field. The topics you open are remembered for this report in this browser (cleared when you sign out). **Expand all topics / Collapse all topics** under the section changes only that section's topics; **Expand all / Collapse all** at the top of the page opens the sections and leaves the topics alone. A closed topic with a field to fix shows "N field(s) need fixing" in its heading; when Save, the PDF or sending stops because of such a field, that topic opens by itself. Nothing you typed in a closed topic is lost, and find in page (Ctrl+F) also finds text in a closed topic and opens it. A user who can only view the report can open and close topics too
SLA availability table	The figures aren't typed in: a **screenshot** of the table in the reporting tool is uploaded. The section has two full-width (two-column) slots — upload one screenshot, or two separate ones (e.g. one table per sub-channel); an empty slot is left out of the PDF
Table	An optional section type: a table whose rows and columns are defined in the template and whose values are typed in (the default template has none; add one with "Add section"). A column is a number, a percentage or text; a "group row" is printed bold on a shaded background. It is filled in as a table on wide screens and as one card per row on phones; in the PDF the header row repeats on every page. A table with no values is left out of the PDF
Text formatting	In long descriptions and topics, a line starting with `-` is a bullet, two spaces + `-` a sub-bullet, `1.` a numbered item and `**text**` bold; the toolbar buttons (Bold, Bullet, Sub-bullet) add the same marks and "Preview" shows the result. The PDF and the e-mail show it the same way

Item	Content
Charts	One image per slot: PNG, JPEG, WebP, GIF or BMP. Images are kept at **full resolution** so figures and text stay readable: a PNG / JPEG within the server limit (longest side 6000 pixels, 12 megapixels, 5 MB) is uploaded as it is. Screenshots and charts are never turned into JPEG (they stay lossless PNG); WebP, GIF and BMP become PNG at the same size, a photo stays JPEG and a phone photo taken sideways is saved upright. Only an image over the limit is reduced — with sharpness-preserving **area averaging** (each new pixel is the average of the area it covers: thin lines and digits don't disappear and no halo forms around letters); what was done is shown under the slot ("7200 × 1800 → 6000 × 1500 pixels"). When embedding into the PDF, only an image larger than 6 times its drawn size (≈ 432 dpi) is reduced the same way — more than enough for print and zoom. If the PDF still exceeds the e-mail attachment limit (15 MB), it is produced again with the images embedded at 4, 3 and then 2 times; the downloaded PDF and the attachment are the same. Images too large to open in the browser (over 60 megapixels), or so thin that they would be unreadable at the server limit, are refused. PDF, SVG, TIFF and iPhone HEIC photos can't go into a slot; the error message says what to do instead (e.g. upload a screenshot of the page as PNG). The images of a report may add up to 40 MB; if an upload would exceed that, you're told before it is sent. In the PDF two consecutive half slots sit side by side and a full slot takes a row. Clicking an image opens it enlarged (fit to the screen, 100% actual pixels, 200%; scroll to move around when it is large; × or Esc closes) — small figures can be read there. An image fills its slot's width on screen and in the PDF: a small image is enlarged, a large one reduced, and its proportions are kept (a chart is never stretched); only an image too tall for a page is reduced to the page height and centred — the screen does the same. Under "About the charts" the default template has two image sections: **12-Month Summaries - Yearly Indicators** (annual operations and error distribution summary, total operations, technical/business error rate trend, quota & unmapped errors, technical errors as a share of all operations, a summary table by department and directorate, technical and business errors by channel) and **{month} {year} Summaries - Daily Indicators** (the report month's operations and error distribution summary, daily total operations, technical and business errors by directorate, the daily technical/business error rate trend, daily quota & unmapped errors, technical errors as a share of all operations). The SLA screenshot section is separate. Channels that kept the old default chart sections unchanged move to these two sections during the upgrade; changed sections are left alone. A team can add or remove slots in its own channel template

Item	Content
Capturing images from the screen	Three ways make adding images faster, and all of them go through the SAME preparation and upload path as "Upload image" (same limits, notes and error messages). **Paste (fastest):** on Windows copy part of the screen to the clipboard with Win+Shift+S (⌘⇧^4 on macOS), click the slot to select it and paste with Ctrl+V (⌘V); where the browser supports it, the slot's **Paste from clipboard** does the same (in a half-width slot it sits in the **More actions** menu together with **Remove**; if the browser refuses access, use Ctrl+V). Pasting into a slot that already has an image asks first — the old image can't be restored afterwards. Pasted text isn't uploaded; a short hint appears instead; a pasted file that isn't an image (such as a PDF) says why it can't be uploaded and what to do. **Capture from screen** (on a computer, in a browser that supports screen sharing): the first press asks which tab, window or screen to share; sharing stays on and later slots take the current image without asking again — switch to the Qlik tab, open the chart, come back and press the slot's "Capture from screen". In the window that opens, drag to select the area to upload (resize from the edges and corners, drag inside to move; arrow keys move by 1 pixel, 10 with Shift, Alt with the arrows resizes, Enter uploads); "Upload this area" uploads the selection as a full-resolution PNG and "Retake" takes a new image from the same share. The image never LEAVES this browser; only the area you confirm is uploaded. While sharing is on, "Screen sharing on" and a **Stop** button appear at the top of the image sections; sharing also stops on its own when you stop it in the browser, leave the report or the panel, sign out, or don't use it for 10 minutes. An image that comes through blank (black) points to a minimised or protected window; a warning appears, and you can still crop it. **Image panel:** the button in the first image section's heading (visible even while the section is closed) opens only the report's image slots in a separate, narrow window (upload, drag and drop, paste, capture from screen, replace, delete, enlarged view). The panel keeps working while the main window moves to another Site Monitor page or another site; an image uploaded in the panel appears on the report screen without a reload, and changes on the report screen reach the panel too (the figures you're typing aren't touched). If the browser blocks the pop-up, the link in the notification opens the panel in a new tab. The panel's **Open in the main window** button opens the report in the main window without reloading the page. While you work in the panel the main window doesn't sign you out for inactivity: the same user's open Site Monitor tabs see each other's activity (a signed-out tab or another user's tab doesn't count). Anomaly topic images take the same paths (if the topic isn't saved yet, the report is saved first); the image panel lists the saved topics' images under each topic's title — new topics, descriptions and image captions are added in the report in the main window; deleting a topic image in the panel also removes its caption from the report. If the panel and the main window upload at the same moment, the server reports a short conflict: the upload is retried once by itself within a few seconds; if that fails too, the message stays in the slot and your prepared image is kept — **Try again** uploads it without capturing it again, **Discard image** gives it up. Before every retry the slot is read again: if the other window put an image into that slot meanwhile, you're asked "Replace the image?" first — **Cancel** keeps that image and gives up yours. While sharing is on, the topic section shows "Screen sharing on" and **Stop** too. Phones have no screen capture or panel (paste and "Paste from clipboard" are there); a user who can only view the report doesn't see these buttons
Automatic trend	Not in the default template: the charts are uploaded as images (the upgrade removes the trend section that came from the default; a team's own trend section stays). When an "Automatic trend" section is added to the template, a bar chart of the last 12 months is drawn automatically for the chosen fields — no screenshot is needed. The figures are the values in the channel's reports for earlier months. The report month's bar is highlighted and follows the figure as you type. A month without a figure stays empty and doesn't count as zero; with fewer than two months of figures a note is shown instead of the chart. A field that is exempt this month (answered "No") isn't charted. The chart uses the CURRENT figures of earlier months: if an earlier month's figure is corrected later, the charts of later months' reports (PDF included) show the corrected figure. If the earlier months can't be read, the screen says so instead of showing an empty chart. The template chooses which number / percentage fields are charted (at most 8); removing a charted field asks for confirmation. The PDF prints the same charts

Item	Content
PO approval and executive recipients	Once the channel's settings carry **executive recipients** (entered by the team's managers), sending the report requires PO approval: the team clicks "Send for approval", the team's active members with the **PO** organisation role (one is enough) receive an e-mail with the full report body, the PDF and a personal, single-use link valid for 14 days (no sign-in needed; the same link page also rejects) — or they open the report in Site Monitor and click "Approve" / "Reject". On approval the report is sent to the channel's executive recipients automatically (team address in CC); if that send fails the approval stays and the team retries with "Send to executives". A rejection needs a reason; the team gets it by e-mail and the report returns to draft. A report changed AFTER the request or the approval is stale: the link and the approval are void and it must be submitted again (shown in the report and its history). Channels without recipients keep the old flow (manual send to the team address). Requests and decisions are in the report's change history and the audit log
Module visibility	Settings → Platform → Technical error report: a global administrator picks the teams that see the module (no selection = everyone; global administrators and auditors always see it). Members of a disabled team don't see the tab and the endpoints answer 403; a scoped admin sees the setting read-only. The same page summarises the channels' approval flow: executive recipient count, PO approver count, the period report's state. The count tiles at the top (sent, started, missing, with executive recipients, without a team address, channels of teams the module is hidden from) filter the list; there are search (accent-insensitive), team and status filters, sorting and paging, and the channel name opens that channel's reports. On a phone the list turns into cards
PDF and sending	"Download PDF" downloads the same file as the e-mail attachment. "Send to team" sends the PDF to the team's address on record; the subject is the report title ("Mobile Channel Technical Error Messages - September 2026"). Every attempt is written to the notification log (`TECH_ERROR_REPORT`). If the mail server is busy the send shows as "queued" and doesn't count as sent yet; when the mail service delivers it the status turns to "Sent" by itself, and if it can't deliver it the send shows as failed. Don't send it again while it is queued; if it stays queued for long, check the SMTP delivery log. **The e-mail body is the report itself:** 1000 pixels wide, a single column on phones; the navy title band of the PDF cover (title, team · channel · period, prepared by and generation time), the executive summary with its colour tiles, the figure values the summary does not already show (no figure is printed twice), the anomaly topics, texts, tables and images appear in the body in the PDF's order — a manager reads it without opening the PDF. Images are embedded at up to 1000 pixels wide (up to 6 MB in total, starting with the first slots; an image that doesn't fit leaves an "Image in the attached PDF (full resolution)" box in its place); full resolution is always in the attached PDF; when the PDF attachment and the embedded images together would exceed the mail limit (15 MB) the images stay out of the body and the slots say "in the attached PDF" (the mail is still sent). Trend charts are only in the PDF, and the e-mail says so. Desktop Outlook never shrinks the 1000-pixel body: a narrower reading pane shows a horizontal scrollbar (widen the window or open the message). No image or text carries a coloured left stripe; colour is used only in the tiles (good green, bad red, neutral blue) and in the anomaly counters (attention orange). In a report of four or more pages the PDF's first page carries a **Contents** block under the cover band (each row jumps to its section); every page after the cover shows the channel and period at the top, and the PDF viewer's bookmarks jump to each section
Change history	"Change history" on the report screen shows who changed which field, when, and from what to what: figure and text changes (the old value struck through, the new one next to it), image added / replaced / removed, the latest template applied, the send and its result. The newest change is at the top; the newest 500 events are kept per report. For reports opened before this feature the history starts on the day it was switched on — for earlier changes only the creation and the last save are shown
Template versions	"Version history" on the Template tab lists every save of the template as a version (the newest 100 per channel). Selecting a version shows what changed compared with the previous one (fields, sections, slots and columns added, removed, renamed or retyped) and an outline of the template. "Load this version into the editor" opens an old version as a draft; nothing is written to the server until you save, and saving makes it a new version. **Sample PDF** in the template editor opens the template (unsaved changes included) as a PDF filled with sample values in a new tab; every page is marked "SAMPLE PREVIEW", nothing is saved or sent (at most 6 per user per minute)

Item	Content
Moving between months	The previous / next month buttons at the top of the report screen open the same channel's neighbouring report in one click; if there are unsaved changes you're asked first. On the channel page reports are grouped by year
Reminders and mail limits	Settings → Platform → Technical error report → the "Reminders and mail limits" card is changed by a global administrator; a scoped manager sees it read-only. Reminders are switched on **per team**: when the previous month's report of an active channel of a chosen team hasn't been opened or was never sent, the team gets one e-mail from the chosen day of the month (default 5th) and then at the chosen interval (default 3 days; 0 = once), plus an optional team push. A send whose result never arrived is listed as "the send result couldn't be read — send the report again"; a channel opened after the period ended is not reminded for that period. When a report has waited for approval for the chosen number of days (default 3) the POs get a short reminder; no new link is created, the original link is mentioned only while it is still valid, otherwise the mail says "open it in Site Monitor". When one PO decides, the other POs are told that no action is needed. The same card changes the e-mail size limit (5–50 MB, default 15) and the budget for images embedded in the body (0–20 MB, default 6) without a restart. Every decision is written to the notification log
Push notifications	Settings → Platform → Technical error report → the "Push notifications" card: technical error report events also reach phones as push notifications next to the e-mail (like the weekly report push). There is one switch per event, all on by default; a global administrator changes them, a scoped manager sees them read-only. The **approval request** (and a pending request resent after 10 minutes) goes to the team's active members with the PO role — including those without an e-mail, never the requester; if the approval e-mail didn't reach them, the push says so. The **approval reminder** goes to the same POs on the same day as the daily reminder; a PO counts as reached when their e-mail or their push got through; a PO reached by neither is tried again the next day — only that PO, the others never get the same reminder twice — up to 3 tries, after which the send log says "not reached in 3 tries" and the next reminder period starts over. The period reminder likewise gives up when the team address fails 3 times. The **decision** goes to the person who submitted it: approved (sending to the executives sent / queued / not sent, with the reason in plain words) or rejected (the rejection note is not put in the push — the push app is outside the company network; the push says "See note in Site Monitor" — at the narrowest push limit (80 characters) that extra sentence may drop, "was rejected" always stays); not sent if they decided it themselves; a requester who has since left the team still gets the decision (and the "delivered" push of a queued send). **Report sent** goes to the team members (never the sender or anyone who already got a push for the same event; for a queued send once delivery is confirmed); when a send to the executives that was queued after the approval is delivered, the person who submitted the report for approval (whose decision push said "queued") gets their own "delivered" push instead of the team one — one push per person. **Not sent** goes to the person who sent it; when a send to the executives that was queued after the approval finally fails, the person who submitted the report for approval gets it too. The period reminder's team push is in this card too. Personal push preferences (minimum level, snooze, "no push") and the hourly limit apply; passive accounts, people who read through access sharing and teams the module is hidden from never get a push; the test mail creates none. Push texts carry no links. Deliveries are filtered in the push log by the "Technical error report …" triggers

Item	Content
Template from another channel, year archive, export	"Import from another channel" on the template screen loads the template of a channel you can read as an **unsaved draft**: nothing changes until you press Save, and if the template's language differs you are told that the report language and month names will change. "Year archive (ZIP)" on the channel page downloads the PDFs of every report of the chosen year as one ZIP file; months that couldn't be downloaded are listed with the reason in the archive's `missing.txt`, and leaving the page while the archive runs asks first. The channel list in Settings can be exported as CSV or Excel (the whole filtered and sorted list). In the new-channel dialog the default template language is your interface language
Extra CC and send log	When you send a report you can add up to 10 extra CC addresses for that send only; they aren't saved on the channel, and if the team address (or the executive recipients) consists only of inactive accounts, the extra CC alone never marks the report as sent. The channel's **Send log** tab shows every report, test, approval and approval-reminder mail with its recipients, time and outcome; the outcome is written as a plain reason instead of the mail server's raw text, and recipients that didn't fit the log are shown as "+N more". The team-level period reminder covers several channels, so it appears in the SMTP log rather than a channel's log
Cross-channel analysis	The **Analysis** button on the channel list compares the same fields across the team's channels (e.g. technical error rate, total transactions) over the last 6, 12 or 24 completed months in a chart and a table. The values are the figures entered in the reports; automatic rates are calculated at that moment, as on the report screen and in the PDF. A month without a report or value stays empty (never counted as 0), every table cell opens that month's report, and the report's "Back to the analysis" button returns with the filters. If a field has a different type in some channels, those channels get a note. Every active channel is listed; a deactivated channel that has a report in the chosen period appears after the active ones with its past months and an **Inactive** badge ("(inactive)" in the CSV header)
Value export	**Export to Excel** on the channel page downloads the values of every report of the selected year (or all years): months in columns, fields in rows, and the reports' status on a second sheet; list filters are not applied. For BI tools, the `/api/tech-error-reports/export` endpoint returns the same data as JSON or CSV; rates are calculated at that moment, as in the PDF, and every row also states the result of the calculation. No personal data is included. It uses session sign-in and the one-session-per-person rule applies: a BI job must sign in with its own account, because each pull made with a person's account signs that person out. Each person can run 6 exports a minute and one at a time

Item	Content
Team template library and template version	Keep the templates your team uses often in the **Template library** (up to 20 per team): add them with "Save to library" on the template screen and make one the team default; the library window (channel list) renames entries, changes the default or deletes them. When you open a new channel the team default is offered first, and the "Back to default" menu also loads library templates as an unsaved draft. The library is open only to the team's own members and managers (not through access sharing). The version history shows how many reports use each template version, and the report header shows which template version the report was built from

Who does what: the team's members and managers open channels, edit templates, fill in and send reports; only a team manager deletes a channel or a sent report; AUDIT and global administrators read every team. If two people save the same template or report at once, the second gets a "changed while you were editing" warning — nothing is overwritten silently; unsaved changes are backed up in the browser. A later template change doesn't alter a sent report; a draft takes it only with "Apply the latest template".

---

15. Operational Procedures

This section is the recipe book for everyday work: the tasks people do often, step by step, with the screen names.

15.1 Adding a Domain

1. Go to the **Domain Inventory** tab and click add.
2. Under basics, enter the domain (for example `api.example.com`), the port (usually `443`), the owning team and the tier.
3. Tick the operational flags that apply and save.
4. The system checks the domain on the next hourly sweep; the first results appear on the **Certificate dashboard**.

Tip: use "Check Now" if you do not want to wait for the sweep.

15.2 When You Receive an Alert

1. Read the domain and days remaining from the email.
2. If you know what is going on, acknowledge the alert on the **Alert History** screen with a short note — the daily reminders stop.
3. Start the renewal process with the CA, the team and the platform.
4. When the renewal is complete, the system picks up the new certificate on the next sweep.
5. Once it is genuinely fixed, mark it resolved with a note; a resolution notice goes out.

For a critical alert: acknowledge it straight away, start the renewal immediately, use resend if you need management informed at once, and mark it resolved when the work is done.

15.3 After a Certificate Is Renewed

1. Deploy the new certificate to the server or platform.
2. Site Monitor detects it on the next hourly sweep.
3. If you have recorded an expected fingerprint in the inventory, deployment compliance is verified too.
4. Mark the relevant alert resolved on the **Alert History** screen; the resolution notice is sent automatically.

15.4 Setting Up a Team

1. Create the users: **Admin Panel** → user management, with the appropriate system and organisational roles.
2. Create the team: team management, with its leader and team email address.
3. Assign users to the team from the user edit window.
4. Define escalation contacts: a minimum alert level for each person, and a Teams or Slack webhook if you want one.
5. Assign certificates to the team: **Domain Inventory** → edit → owning team.

If you use the directory, steps 1 to 3 largely happen by themselves: the user is provisioned on first sign-in and their manager relationship is picked up automatically.

15.5 An Escalation Contact Template

```
Scenario: escalation for one team

Product owner:     minimum level WARNING  → told about everything
Technical owner:   minimum level WARNING  → told about everything
Manager:           minimum level HIGH     → high and critical only
Director:          minimum level CRITICAL → critical only
```

15.6 Planning a Maintenance Window

1. Create a new window on the **Maintenance** tab with a name and description.
2. Choose the targets: the affected monitors, or "all monitors".
3. Set the time zone, start time, duration and recurrence — one-off, daily, weekly or monthly.
4. While the window is active no alerts are raised, nothing is sent and the uptime percentage is unaffected; when it ends, monitoring resumes exactly where it left off.

15.7 When the Application Has Been Down

While the application is down, scanning stops and nothing is sent. On restart, catch-up takes over: any of that day's outstanding daily notifications are sent immediately, without a network call, and the full sweep follows. However long the outage lasted, the day's notifications still go out.

15.8 Automatic Clean-Up of Old Records

Every check writes a row to the database; five hundred monitors running once a minute produce half a million rows a day. The retention policy is what keeps that in check. You manage it from **Settings → Retention**, where each row represents a table and its retention period in days.

Clean-up runs as a single job at 03:00 every night, and the order matters:

1. **Roll up first.** Raw check rows are summarised into the daily and hourly rollup tables, looking a few days back with an idempotent upsert. The long-term trend survives even after the raw data goes.
2. **Then delete.** High-volume tables are purged in batches (10,000 rows by default), keeping each transaction short so locks are not held.
3. **Finally analyse.** Statistics are refreshed so the query planner works against the new table sizes.

Notable defaults:

Record	Default retention
Raw check series (status, certificate, port, keyword, ping, DNS, HTTP, domain)	180 days
Activity log	365 days
Audit log	365 days, archived as JSON before deletion
Notification log	365 days
Daily rollup / hourly rollup	730 days / 365 days
Per-minute HTTP metrics	7 days
Heartbeat	30 days
Page resource issues	90 days
Images (incidents, weekly reports)	730 days
Incident records	0 = never deleted (opt in if you want it)

Three behaviours are worth knowing. **Only closed records are deleted** — an open alert, an unresolved incident or an ongoing storm survives regardless of age. **DNS and domain series always keep a baseline row per monitor**, because without it there is no reference left for the "has this changed?" comparison. And while the **legal hold** switch is on, nothing is deleted from anywhere — during an audit period you can stop all clean-up with a single toggle.

Every run is written to the retention history, so the **Settings → Retention** screen tells you which night removed how many rows from which table. Before changing a policy, use **Dry Run** to see how many rows would be affected.

15.9 Using a Proxy in Production

Some targets have a WAF or firewall that rejects the monitoring pod's address. For such a domain:

1. Put the proxy address into the production values file for your environment and run a Helm upgrade. The values reach the ConfigMap, and the configuration checksum annotation rolls the pod for you.
2. Edit the domain on the **Domain Inventory** screen and turn on "check through the proxy".
3. On the next sweep only that domain's check goes through the proxy; the tunnel steps are visible in the logs.

> **Do not pass operational values with command-line overrides.** Values supplied only on the command line live in that release's own values and disappear silently when the release is renamed or reinstalled. This has actually happened: proxy settings were lost during a release migration and domain registration lookups timed out for days. Anything production depends on belongs in the environment values file.

A warning: routing all pod traffic through the proxy will break the checks that currently work — flag only the domains that have a problem. List any internal addresses you want to keep direct in the proxy exclusion list; matching is by suffix, so an entry for a domain also excludes all of its subdomains.

15.10 End-to-End Monitoring in Grafana

For teams that want to follow Site Monitor outside its own interface there is a ready-made Grafana dashboard. It reads Site Monitor's own Prometheus metrics: the live state of every monitor, open alerts, certificate and domain expiry, notifications, storms and Site Monitor's own health. Teams follow their monitors without signing in to Site Monitor; when they need the details, the link on a row opens the monitor, alert or certificate in Site Monitor.

Setting it up takes three steps.

1. **Let Prometheus scrape Site Monitor.** There are two endpoints: the unauthenticated `/metrics` carries only JVM, HTTP and app health; the dashboard's business data (monitors, alerts, certificates, teams) is served **only** on `/metrics/sitemonitor` and **only with a bearer token** (`Authorization: Bearer`). The token is the `METRICS_EXPORT_TOKEN` environment variable (Helm `secret.metricsExportToken`; at least 32 random characters) — it is not entered in Settings and no screen shows it; the page only says "configured / not configured". Without a token the endpoint answers 404 and the metrics exporter does not run at all. Add two jobs to Prometheus (one reads the token from a `credentials_file`) — **Settings → Platform → Grafana dashboard** has an example you can copy. **Anyone who knows the token reads the whole monitoring inventory**: keep it like a password and block the `/metrics*` paths from the outside at the Ingress / NetScaler (runbook: "Grafana panosu ve Prometheus").
2. **Import the dashboard.** On the same page pick the title, the dashboard UID, the Site Monitor address, the Prometheus label matcher (when one Prometheus scrapes several environments, e.g. `namespace="site-monitor-prod"`), the default time range, the refresh, the language, the sections and the default team, then press **Download JSON**. In Grafana use *Dashboards → New → Import* to upload the file and pick the Prometheus data source that scrapes Site Monitor. Importing again with the same UID updates the existing dashboard.
3. **Share it with the teams.** Pick the **Team** filter at the top of the dashboard and save the view, or add `?var-team=<team name>` to the link, and give the teams view access in Grafana. For a separate dashboard per team, change the default team and the UID and download another JSON. **This is a convenience, not access control:** Grafana applies no team scoping — anyone who can open the dashboard or the data source can change the filter and see every team. Teams whose data must stay private need a separate Grafana data source and folder permissions.

What is on the dashboard? Seven sections: *Overview* (up / down / stale / unknown / paused counts, the 24-hour success rate, open alerts by level, expiring certificates and domains, active storms, the overall self-monitoring state, state by type and team), *Alerts* (time series by level and type, the team table, the open alert list, the oldest alerts), *Monitor state* (each monitor's state, last and 24-hour response time, success rate, availability over the selected range and the time since its last check; a state timeline of the monitors that had problems; the slowest ones), *Certificates and domains* (days left, state, TLS grade, the ones expiring within 30 days), *Notifications and storms*, *Site Monitor health* (pods, version, sweep leader, self-monitoring checks, locks, database, retention job) and *Runtime* (HTTP rate and latency, JVM, GC, CPU, connection and thread pools, log errors). Filters: team, monitor type, monitor, alert level, "top N", Prometheus job and pod. Deployments and critical / high alert openings appear as vertical lines on the charts.

Colours mean the same everywhere: green up, orange stale (the check did not run on time), red down or failing, grey paused or unknown. **"No data" is never a fake 0:** when the metrics exporter cannot read a source it does not export that source's series at all; you see a gap on the dashboard and *Site Monitor health → Unreadable sources* tells you why. When the exporter's last refresh is older than three refresh intervals (at least 3 minutes) the endpoint serves no business values at all — old values never look current; the **Data freshness** banner at the top of *Overview* says so.

Where do the metrics come from? The metrics exporter runs on every pod once a minute, off the request path, and writes the `sitemonitor_*` metrics (per-monitor state and response time, team / type totals, alerts, certificates, domains, storms, notifications, push, self-monitoring, the sweep leader, locks, database and maintenance state). Every pod exports the organisation values identically and the dashboard combines them regardless of the pod. Per-monitor series (**off** by default — turning them on shows every monitor's name and target to whoever holds the token) and the record cap per family (5000 by default; problem records are kept above it) are changed on the same page. Target labels carry only the scheme, host, port and path; the query string and the fragment (which can carry secrets) are never written. To write your own panels and alert rules, the **Exported metrics** catalogue on the page lists every metric's name, scope, labels and meaning.

Dashboard revision. The dashboard description carries a revision number and the Site Monitor version. When a release adds a panel or a metric to the dashboard the revision goes up and the badge on the page shows it — download the JSON again and import it with the same UID.

---

16. Deployment and DevOps

Site Monitor ships as a single container image — the React interface is served as static content from inside the back-end jar, so there is no separate web server. This section covers bringing the application up from scratch, how the image is built, and how releases flow.

16.1 Local Development

You will need **Java 25**, **Maven 3.9 or later** (there is no Maven wrapper in the repository, so Maven must be installed), **Node.js 20 or later**, and a running PostgreSQL.

Start with the configuration file:

```
cp .env.example .env      # database, mail, admin credentials
```

Spring Boot does not read `.env` itself — Docker Compose and the local start-up script read it and translate the values into system properties. If you run the back end directly, supply the values as environment variables.

Back end, from the `backend` directory:

```
mvn spring-boot:run          # development server on :8080
mvn -B clean verify          # what CI runs: tests plus coverage
mvn package -DskipTests      # produces the deployable jar
```

Front end, from the `frontend` directory:

```
npm install
npm run dev                  # Vite on :5173 — /api and /metrics proxy to :8080
npm run build                # produces dist/, with the version baked in from VERSION
npm run test                 # unit tests
npm run test:coverage        # with the coverage thresholds enforced
npm run test:e2e             # Playwright; starts its own Vite on :5174
```

The two ports are deliberately separate: the end-to-end tests use 5174 so that they never kill the development server you have open on 5173.

On Windows there is a script that brings the whole stack up in one go: it reads `.env`, stops only the process listening on 8080 (not every Java process), starts the newest jar and waits for the health endpoint to report healthy.

> After changing back-end code, do not restart without repackaging. The start-up script runs the compiled jar, and running the tests does not rebuild it — otherwise the application carries on serving the old code and your new fields come back empty.

16.2 The Container Image

```
Registry : ghcr.io/<owner>/site-monitor
Tags:
  latest               (current production)
  vX.Y.Z               (release tag)
  develop-a1b2c3d      (development commit)
  X.Y.Z-rc / staging   (release candidate)
```

The image is built in four stages:

```
grafana/k6            →  the k6 binary is copied out (for synthetic monitoring)
node:20-alpine        →  npm ci + vite build  →  dist/
maven:3.9-temurin-25  →  mvn package          →  app.jar
temurin-25-jre-alpine →  runtime
```

The runtime layer is deliberately well-equipped: `curl`, `bash`, `dig`, `openssl`, `traceroute` and the ping utilities are installed, because the in-application network diagnostics and the ping monitor use them. The container runs as a non-root user with a read-only root filesystem and all capabilities dropped; the only writable paths are `/tmp` and `/var/log`.

For a local full stack:

```
docker-compose up -d          # application on :8080
```

16.3 Installing with Helm

The chart produces the following templates:

Template	What it does
`deployment.yaml`	The application pod — probes, security context, volumes, downward-API environment
`service.yaml`	ClusterIP, 80 → 8080
`ingress.yaml`	Host, TLS secret, nginx annotations
`configmap.yaml`	All non-secret configuration, injected as environment variables
`secret.yaml`	Passwords and the encryption key, retained on uninstall
`serviceaccount.yaml` · `namespace.yaml`	Identity and namespace
`hpa.yaml` · `pdb.yaml`	Autoscaling and disruption budget — switched off in the single-pod configuration

There is no CronJob. Every scheduled job runs inside the application process, under a database-backed distributed lock. That is what guarantees the same sweep never runs twice, even if you scale to several replicas.

Installing:

```
helm upgrade --install site-monitor ./helm/site-monitor \
  -f helm/site-monitor/values.yaml \
  -f helm/site-monitor/environments/master.yaml \
  --set image.tag=$(cat VERSION) \
  --set secret.adminPassword=$ADMIN_PASSWORD \
  --set secret.dbPassword=$DB_PASSWORD \
  -n site-monitor --create-namespace
```

Or straight from the published chart:

```
helm install site-monitor oci://ghcr.io/<owner>/sitemonitor-chart --version <X.Y.Z>
```

16.4 Where the Values Come From

Helm values are applied in layers, and **each layer overrides the one above it**:

```
helm/site-monitor/values.yaml            <- chart default (single-pod profile)
        |
        v  added with -f
helm/site-monitor/environments/<env>.yaml    <- environment profile
        |                                       develop . release . master
        v  added with --set
command line                             <- SECRETS AND IMAGE TAG ONLY
```

Values file	Environment	Notes
`develop.yaml`	Development	Email off, infrequent scanning, one replica
`release.yaml`	Staging	A production-like verification environment
`master.yaml`	Production	Ingress host, proxy settings, database pool, allowed origins

> Command-line overrides are for **secrets and the image tag only**. Persistent values that production depends on — the proxy address, the ingress host, the pool size — must live in the environment values file. See the warning in §15.9.

Configuration reaches the pod as **environment variables**: the ConfigMap carries the non-secrets while the Secret carries the administrator password, the database password, the mail password, the encryption key and any proxy credentials. Configuration checksum annotations on the deployment mean the pod rolls itself when configuration changes — no manual restart needed.

If the application base address is left blank, the chart derives it from the ingress host and TLS setting; links in emails use that address.

16.5 Versioning and Release Flow

```
commit (conventional prefix)
        |
        v
   ci.yml  -- 4 jobs --+- backend      : mvn -B clean verify
                       +- frontend     : npm ci -> test:coverage -> build -> audit
                       +- frontend-e2e : Playwright / Chromium
                       +- helm-lint    : against all three environment values files
        |
        v (main branch only)
  release.yml
        +- Gate    : is CI green for this commit? if not, no release
        +- Detect  : feat -> minor . fix/chore/refactor -> patch . breaking -> major
        +- Write   : VERSION + Chart.yaml (version and appVersion)
        +- Image   : buildx -> registry  +  vulnerability scan
        +- Chart   : helm package -> OCI push
        +- Tag     : vX.Y.Z  -> GitHub Release
        +- Back-merge: main -> develop
```

A fourth workflow scans dependencies against the vulnerability database every Monday. It is kept off the release path because it is slow.

Two rules protect the release pipeline:

- **Never edit the version files by hand.** The release workflow writes both; a manual bump produces a conflict on the next rebase. You commit code with a conventional prefix and let CI decide the version.
- **Never put a CI-skip token in a commit body.** The platform skips every workflow for that push, including the release gate.

The single source of the version number is the root `VERSION` file. The interface bakes it in at build time and the back end reads it at runtime. The version fields inside the build files are deliberately left alone — nothing reads them.

---

17. Resilience and Availability

If the monitoring platform goes down, so does your alerting. Site Monitor runs as a single pod in production, so resilience rests on two things: the pod coming back quickly and in the right order, and no state ever living in the pod's memory. This section covers those mechanisms, and ends with what is already waiting if you want to scale out.

17.1 Update Behaviour

```
replicaCount: 1
strategy:
  type: RollingUpdate
  maxSurge: 1          # the new pod comes up first
  maxUnavailable: 0    # the old one only goes when the new one is ready
```

On a single-pod deployment `maxUnavailable: 0` is the setting that matters most: the old pod carries traffic until the new one passes its readiness probe, so an upgrade is invisible to users. When the old pod shuts down it first leaves the load balancer during a 10-second preStop pause, then hands over the sweep leadership at once, finishes the notifications it is sending and, with graceful shutdown in the application, completes in-flight requests and the running job. All of it fits inside the 120-second termination grace period (preStop 10 + notification drain 20 + web 20 + executors 20 + scheduled jobs 20 + about 10 s).

17.2 Health Checks

Type	Endpoint	Delay	Period	Failure threshold
Startup	`/health/readiness`	—	10s	30 → restart (about a 300-second budget)
Readiness	`/health/readiness`	5s	5s	3 → traffic withdrawn
Liveness	`/health/liveness`	0s	15s	6 → restart

Each of those numbers has a reason. **The start-up budget is generous** because the first boot after an upgrade validates the schema, applies patches and warms the settings caches; a tight budget puts the pod into a restart loop. **Liveness does not look at the database** — a brief database outage does not make the application itself unhealthy, and restarting the pod would only make things worse. **Readiness refuses traffic during start-up**, so the pod never looks ready while leaving the first requests hanging.

17.3 Where State Lives

Nothing durable lives in the pod's memory, so a restart loses nothing.

State	Where it lives	On pod death
User sessions	The session table in the database	Preserved — nobody has to sign in again
Scheduler lock	The lock table, with a TTL, renewed every 30 s while the job runs	Released at shutdown; after a crash, free once the TTL (≤ 3 minutes) expires
Sweep leadership	A lease row in the schedule table (180 s)	Handed over at shutdown; after a crash, another pod takes it when the lease expires
Alert state	The alert tables	Preserved
Confirmation and recovery counters	The leader pod's memory	Rebuilt — an alert about to open or close re-confirms on the new leader (later, never twice)
DNS / domain change	A "pending" mark on the check row	Preserved — the new leader decides it
Network outage state, a resolution email still to send	The outage row, a mark on the alert row	Preserved — another pod carries on
Maintenance window cache	In memory, refreshed every 30 seconds	Rebuilt
Settings caches	In memory, refreshed every 10 seconds	Rebuilt

17.4 Catching Up After Downtime

While the pod is down, scanning stops and nothing is sent. On start-up, catch-up runs: any of that day's outstanding daily notifications go out immediately without a network call, and the full sweep follows. However long the application was down, the day's notifications are still delivered.

Heavy start-up work is deferred by a configurable delay, so that in the first seconds after boot the CPU goes to users trying to sign in and to password verification.

17.5 Moving to Horizontal Scaling

Two or more pods are supported (multi-pod release 1, 2026-10-21). One thing to know: **a single pod (the leader)** runs every monitoring sweep — a second pod brings high availability and interface capacity, not monitoring capacity. If the monitoring load grows, scale vertically first; autoscaling stays off for that reason. The multi-pod behaviour exists in the code and runs harmlessly on a single pod today:

- **Sweep leadership** (see §5.3) — the pod holding the lease runs the monitoring sweeps; when the leader shuts down another pod takes over in about half a minute (at most ~4 minutes if a pod dies suddenly; a stuck leader gives the lease up after 10 minutes). A "Check now" pressed on a follower is forwarded to the leader for evaluation.
- **Renewed scheduler locks** — however many pods there are, only one runs a given job; a job that loses its lock does not save its results.
- **Claim first, then send** — opening an alert, re-alerts, resolution emails, closing a storm, pushes, the weekly report and the weekly availability email are claimed at row level: the same notification never goes out twice from two pods, and it is not lost when a pod shuts down.
- **The database-backed session store** — sessions are shared across pods; Helm refuses several pods with the in-memory session store.
- **The single-active-session registry** — a user has one session regardless of which pod they land on.
- **Periodic settings cache refresh** — a change made on one pod reaches the others within seconds.

The move is a step of its own: first deploy the new version on one pod, then switch to `replicaCount: 2` with a disruption budget using the same image (`docs/PROD_DEPLOY_CHECKLIST.md` → "Çok pod"). Check beforehand: **the same network egress from every node** (proxy, SMTP, LDAP, push, internal targets — leadership changes node on every deployment); node clocks in sync; and database connections — the pool is sized **per pod** and one extra pod is open during a rollout, so `max_connections ≥ (replicas + 1) × pool size + 25`. Synthetic monitoring runs its k6 subprocesses on the leader; any pod can become the leader, so every pod's memory limit must leave room for them.

---

18. Configuration Reference

Site Monitor has two kinds of setting, and it is important not to confuse them. **Static configuration** comes from files and environment variables and needs a restart to change. **Live settings** live in the database and are changed from the interface, taking effect immediately. This section gives the rule first, then both lists.

18.1 Precedence and Where a Setting Comes From

```
Highest precedence
      |
      +-- app_settings table         ->  Management -> Settings screen, IMMEDIATE
      |                                  (about 180 curated keys)
      +-- environment variable       ->  ConfigMap / Secret / .env, NEEDS A RESTART
      |
      +-- application.properties     ->  the code default
Lowest precedence
```

A row in the database is an **override**: delete it and the value falls back to the environment variable or the file default. So not seeing a key in the settings table does not mean there is no setting — it means it is running on its default.

If you run several pods, changes propagate quickly rather than instantly: settings caches refresh roughly every ten seconds, and the maintenance window cache every thirty.

The application logs an **effective configuration** block on every start-up. It is grouped by category, and each line ends with a label saying where the value came from — default, file, environment or database. Reading that block is the fastest way to solve "I changed this setting and nothing happened". Secrets are masked; encrypted values are never decrypted for the log, only reported as set or unset.

There are three configuration profiles: the default file (leaning towards development), the production profile (Kubernetes — database-backed sessions, secure cookies, file logging), and a local profile that serves a pre-built interface from a single port.

Real values are never committed; you work from the example files provided.

> **Environment variable names from before the product was renamed still work.** The application-specific prefix changed, but each key is read through a fallback chain: the current name first, then the previous name, then the default. When a variable with an old name is found, a warning is logged once at start-up. To finish the migration, update the names in the ConfigMap and the Secret; both names are valid in the meantime.

18.2 Static Configuration

Parameter	Default	What it does
`site.monitor.warning-days`	30	The day the warning band starts
`site.monitor.parallel-workers`	20	Concurrent checks
`site.monitor.check-timeout-seconds`	6	TLS socket timeout
`site.monitor.scheduler.cron`	`0 0 * * * *`	The hourly sweep
`site.monitor.scheduler.stale-minutes`	65	When a domain counts as stale
`site.monitor.scheduler.lock-ttl-minutes`	10	Distributed lock lifetime
`site.monitor.scheduler.cleanup-cron`	`0 0 3 * * *`	Nightly clean-up and rollup
`site.monitor.alert.default-warning-days`	30	Warning threshold
`site.monitor.alert.default-high-days`	15	High threshold
`site.monitor.alert.default-critical-days`	7	Critical threshold
`site.monitor.alert.default-realert-hours`	24	Reminder interval
`site.monitor.cache.crl-ttl-hours`	1	CRL cache lifetime
`site.monitor.dns.query-timeout-ms`	2000	DNS query timeout
`site.monitor.dns.resolvers`	public resolvers	Used for propagation checks

Capacity and resources:

Parameter	Default	What it does
`SCHEDULING_POOL_SIZE`	8	The scheduled-job pool; the frequent sweeps and cache refreshes must all fit
`TOMCAT_MAX_THREADS`	100	The HTTP thread ceiling — deliberately below the framework default so it stays in proportion to the connection pool
`DB_POOL_MAX` / `DB_POOL_MIN`	25 / 10	Database connection pool, **per pod**
`EXECUTOR_CORE_SIZE` / `EXECUTOR_MAX_SIZE`	20 / 50	The check thread pool
`JAVA_OPTS`	see the chart	Sizes the heap against the container limit and exits on out-of-memory

Security and networking:

Parameter	What it does
`SITE_MONITOR_SECRET_KEY`	The encryption key for stored mail, directory and synthetic-monitoring secrets. **Mandatory in production**, must be stable and identical across pods; change it and stored secrets become unreadable
`CLIENT_IP_HEADERS`	The ordered list of headers to read the real client address from
`SPRING_SESSION_STORE_TYPE`	Database-backed in production, in-memory locally
`SITE_MONITOR_USERNAME` / `SITE_MONITOR_PASSWORD`	The bootstrap administrator account
`HTTP_PROXY_HOST` / `HTTP_PROXY_PORT` / `NO_PROXY`	Outbound proxy and its exclusions
`TLS_MODE`	`browser` by default, which presents a browser-like TLS fingerprint so that WAFs do not reset the connection

Logging:

Parameter	What it does
`logging.level.com.sitemonitor`	The application log level
`LOG_TIMEZONE`	The time zone used for log timestamps; business timestamps stay in UTC

18.3 Identity and Lockout

Parameter	Default	What it does
`site.monitor.lockout.failures-needed`	`5,3,2,1`	Failures required at each stage
`site.monitor.lockout.durations-seconds`	`30,120,600,1800`	The wait at each stage
`site.monitor.lockout.permanent-failures`	5	When the permanent lock applies
`site.monitor.remember-me.validity-seconds`	604800	"Remember me" lifetime, seven days
`PASSWORD_MIN_LENGTH` / `MAX_LENGTH` / `HISTORY_COUNT`	6 / 64 / 5	Password policy

18.4 Email

Parameter	What it does
`SITE_MONITOR_EMAIL_ENABLED`	Turns email on
`SPRING_MAIL_HOST` / `SPRING_MAIL_PORT`	Mail server and port
`SPRING_MAIL_USERNAME` / `SPRING_MAIL_PASSWORD`	Sending account credentials
`SITE_MONITOR_EMAIL_FROM`	The sender address
`APP_BASE_URL`	The base address used in email links

These are enough to start. After installation, managing mail from **Settings → SMTP** is far more practical — changes there are written to the database, need no restart, and the screen can send a test message.

18.5 Live Settings

About 180 keys can be changed from **Management → Settings** while the application is running. The keys are not free-form; they come from a curated catalogue, so a setting you cannot see on screen cannot be changed live. The groups:

Group	What it governs
`general`	Application base address, system administrator email, allowed origins, problem-reporting switches, environment name (version panel, deployment history and Grafana label; falls back to Helm's `APP_ENVIRONMENT`, then to an automatic value)
`security`	The corporate certificate authority bundle and automatic authority pinning
`branding`	Application name, tab title, sign-in text, primary colour, logo, announcement banner
`monitoring`	Per-type alert switches, internal and loopback target policy, DNS resolvers and timeouts, registration lookup addresses, page crawl limits
`scripted`	Synthetic monitoring pool, timeout ceilings, the k6 binary path, hard-coded-secret and syntax policies
`frequency`	Default interval, timeout and slow thresholds for new monitor forms
`outage` · `scheduler`	Bulk network outage thresholds, stale-check period
`storm`	Alert storm threshold unit, window and grouping behaviour
`login-anomaly`	Failed sign-in detection rules and recipients
`weekly`	Weekly report scoring weights
`logging`	The application log level — changeable live
`retention`	Retention period per table, batch size, rollup and the legal hold switch

Three families live on their own screens: **SMTP**, **Directory** and **Retention**. Proxy settings are deliberately not live — they come only from environment variables, because changing network egress from a web interface would soften a corporate security boundary.

---

19. Release Information

Item	Value
Current version	20.198.0
Document date	August 2026
Java	25 (LTS)
Spring Boot	4.1.0 (Spring Framework 7, Jakarta EE 11, Hibernate 7, Tomcat 11)
BouncyCastle	1.78.x
React / Vite	18.3 / 5.4
PostgreSQL	16 or later
Container image	`ghcr.io/<owner>/site-monitor`

Item	Value
Helm chart	`ghcr.io/<owner>/sitemonitor-chart`
Languages	Turkish and English
Licence	Corporate use

The version number comes from a single `VERSION` file and increments automatically from conventional commit prefixes:

Prefix	Increment	Example
`feat:`	Minor	`1.4.2` → `1.5.0`
`fix:` / `chore:` / `refactor:`	Patch	`1.4.2` → `1.4.3`
Breaking change	Major	`1.4.2` → `2.0.0`

The version fields inside the build files do not match this number and are not expected to — nothing reads them; the root `VERSION` file is the single source of truth.

19.1 Recent Highlights

The 20.x series is where the product matured under the Site Monitor name with its extended monitoring family. The highlights:

- Shareable deep links and consistent pagination across every list view: what you see on screen lives in the address bar, and no list ever draws more than two hundred records at once (see §14.1).
- Alert History rebuilt: server-side search, filters by level, team and ownership, a statistics strip, collapsible grouping by subject, "open for" and "recurred" badges, CSV export, and recognition of all twenty-eight alert types.
- A **mandatory reason note** when acknowledging or resolving an alert — the record now answers "why was this closed?" rather than just "who closed it?".
- The weekly availability email now carries a detailed outage report as a PDF attachment, with charts and status colouring.
- Retention managed from a single catalogue: a period per table, a dry run, a run history and a legal hold switch (see §15.8).
- Branding and email refresh: the brand mark across the interface, the tab icon and emails, with templates rebuilt to render correctly in corporate mail clients.
- The monitoring family completed: page integrity, synthetic k6 journeys and domain registration monitoring, with response charts up to 90 days.
- Maintenance windows with daylight-saving-safe recurrence, guaranteed silence and uptime exemption.
- Alert storm grouping and bulk network outage suppression to keep notification noise under control.
- System Health extended with database analytics, sign-in time series and an activity heat map.
- Hardening for OpenShift: probe groups, readiness gating at start-up and a liveness check independent of the database.

19.2 The Platform Upgrade

- Runtime: Java 21 to 25 (LTS); Spring Boot 3.3 to 4.1, bringing Spring Framework 7, Jakarta EE 11, Hibernate 7 and Tomcat 11.
- The JSON stack was upgraded with the API contract preserved by controller tests.

- The test framework moved to the current annotations, and the coverage and code-generation tooling was raised to versions compatible with the new JDK.
- Operational note: because the session schema changed, users may need to sign in once after the first deployment.

19.3 Lasting Gains from Earlier Generations

- Identity: directory sign-in, automatic provisioning on first sign-in, and multi-team permission scope.
- A single team model, with card-based team management.
- Weekly reports, approval by email link and a Friday reminder.
- Robustness: HTTP connection leaks closed, a global exception handler, error boundary layers and resilient parallel loading.
- Performance: escalation lookups batched at the start of a sweep, a single cache eviction at the end, and asynchronous mail retry.

---

20. Production Readiness Checklist

The default configuration is meant for local development and is deliberately insecure; the production profile and your environment variables must override it. Work through this list before you go live.

20.1 Mandatory Security Variables

Variable	Why	Insecure default
`SITE_MONITOR_SECRET_KEY`	Stored directory and mail passwords are encrypted with it. Left empty, it falls back to a built-in development key. At least 32 random characters, and permanent.	empty → development key
`SITE_MONITOR_USERNAME` / `SITE_MONITOR_PASSWORD`	The bootstrap administrator credentials	`user` / `password`
`CORS_ALLOWED_ORIGINS`	Permit only your production hosts	local development hosts
`COOKIE_SECURE=true`	Session cookie over HTTPS only	`false`, though `true` in the production profile
`DB_PASSWORD`	The database password; mandatory in the production profile	—

20.2 Recommended Settings

Variable	Why
`APP_BASE_URL=https://<host>`	Email links use it; without it, links point at localhost
`SYSTEM_ADMIN_EMAIL`	The recipient for network outage and system notifications
`SITE_MONITOR_EMAIL_ENABLED=true` plus SMTP	With email off, alert notifications are silently not sent
`SPRING_SESSION_STORE_TYPE=jdbc`	Sessions survive pod restarts

Variable	Why
Password policy variables	The defaults are production-appropriate; raise them to match your corporate policy

20.3 Access and Permission Checks

- The bootstrap administrator gate: the account named in the configuration always reaches the mail, directory, secret, database and general settings. Renaming the account does not lock you out, and creating another user called "admin" does not get anyone in.
- The permission matrix: the administrator role is locked and cannot be revoked. Destructive operations are marked sensitive and ask for confirmation when granted; two system-wide operations are additionally administrator-protected.
- Default permissions are seeded on first start-up, and new permissions introduced by later releases are backfilled into existing databases with administrator customisations preserved.

20.4 Kubernetes and OpenShift Notes

- The health probes use separate groups: liveness is independent of the database, so a database wobble does not restart the pod, while readiness and startup refuse traffic until boot has finished.
- Deploy with `helm upgrade` and verify with a rollout status check. A generous CPU limit speeds up the cold start.
- If a corporate SSL-inspecting proxy breaks domain registration lookups, capture the proxy certificate chain from **Settings → Domain Diagnostics** and add it to the trust bundle. Some country-level domains do not offer a modern registration protocol at all and need a firewall opening for the legacy port.

---

21. Glossary

Terms are used consistently throughout this guide; the Turkish equivalents used in the interface are given where they differ.

Term	Definition
Alert	The recorded event for a detected problem. In this guide "warning" refers only to the WARNING severity level.
Alert level	WARNING, HIGH or CRITICAL — how urgent the problem is.
Alert type	The class of problem: expiry, revoked, broken chain, mismatch, accessibility, port down, DNS failure, DNS changed, registration expiry and so on.
Acknowledgement	Marking an alert as seen. It stops the daily reminders; it does not close the alert.
Resolution	The problem is fixed, the alert closes and a resolution notice is sent.
Re-alert	The daily reminder sent for an open, unacknowledged alert.
Escalation	Widening the recipient list as the alert level rises.
Escalation contact	A person who receives a team's alerts, carrying a minimum level and an optional webhook.
Confirmation count	How many consecutive failed checks are required before an alert is raised.
Recovery count	How many consecutive successful checks are required before a monitor is declared healthy.
Alert storm	Many simultaneous outages collapsed into a single bulk notification.

Term	Definition
Maintenance window	A planned downtime period during which alerts and notifications are fully suppressed for the target monitors.
Sweep	One scheduler pass across all targets.
Inventory	The register of monitored certificate domains.
Tier	The criticality band of a domain, from 1 (customer-facing production) to 4 (development and sandbox).
Monitor	An individual monitoring target outside the certificate sweep — HTTP, port, DNS, keyword, ping, page, synthetic or domain.
Uptime percentage	The proportion of successful checks for a target; checks made during a maintenance window are excluded.
Registration lookup	The protocols used to query domain registration data; the modern one is preferred and the legacy one is the fallback.
OCSP / CRL	Certificate revocation checking methods; OCSP is tried first, CRL is the fallback.
Distributed lock	The database lock that keeps a sweep running on exactly one pod.
Bootstrap administrator	The local administrator account defined at installation that always reaches the settings screen.
Permanent deletion	Removing a record and its data irreversibly; every delete in Site Monitor is permanent (switch "Active" off to pause instead).
Provisioning	Creating a directory user automatically on first sign-in and assigning their role and team.
Webhook	An HTTP notification to a Teams or Slack channel.
Inline image	An image embedded in an email by content reference, so it renders even when remote content is blocked.
Rollup	Summarising raw check rows into daily and hourly tables before deletion, so the long-term trend outlives the raw data.
Retention	How many days of data a table keeps; the nightly job removes anything older.
Legal hold	A single switch that stops all automatic deletion, used during audit periods.
Bulk network outage	Deciding, when the error rate crosses a threshold, that the fault is our own egress rather than the targets, and suppressing individual alerts.
Certificate authority pinning	Trusting and storing the authority first seen on a server, then validating later checks against it.
Corporate authority bundle	Adding an SSL-inspecting proxy's certificate authority alongside the system roots as an extra trust anchor.
Registrable domain	The root form of a domain at which registration is held; registration lookups always happen at this level.
EPP status code	Status labels on a registration record, some of which indicate the domain is close to being lost.
Proxy exclusion suffix matching	An entry in the proxy exclusion list also covering its subdomains.
Request forgery protection	Validating every resolved address of a monitoring target against internal, loopback and cloud metadata ranges.
Deep link	A shareable address carrying the filter, page and open-window state of a screen.
Scoped administrator	An administrator limited to particular teams, who — unlike a global administrator — cannot reach the permission matrix, audit log or SQL console.

This document was prepared for Site Monitor v20.198.0, as of August 2026.